MORRIS
COUPLING COMPANY



PRICE BOOK

Compression Couplings

Morris Coupling Company

Serving the pneumatic conveying industry with a complete line of precision quality coupling and tubing products, enabling you to purchase all of conveying your needs from one source. Fast delivery to meet your schedule.

Compression Couplings
- For Tubing and Pipe 1-3
- With Gasket Protectors 4
- Side-Band Couplings 5
- Replacement Gaskets 6

Quickon Couplers 7

Morris Gripper Couplers 8

Repair Clamps
- All A Round 9
- Single-Type 10
- Double-Type 11

Morris Flexible Hose
- PVC 12-13
- Metal 14-15

Installation Components 16-17

Tubing Products
- Long Radius Tube Bends 18
- Straights 18
- Tees, Wyes, Laterals 18

Sight Glasses 19

Wands
- Morris Gaylord Vacuum 20

Morris Coupling Nomenclature 21

Ordering Information

When ordering couplings, first determine the pipe size (IPS) or tube diameter (OD), choose the appropriate gasket material, decide whether or not you need a gasket protector or grounding strip (stainless steel or aluminum), and then select the corresponding coupling for your application. Always state the outside diameter of the pipe or tube, the size code number, and the price. If you prefer to use our computer PIC number designation, see page 21 for a complete explanation

Terms

1% 10 Days, Net 30 Days.

F.O.B. Point

Factory

- Coupling Products, Repair Clamps – Erie, PA
- Tubing Products, Sight Glasses – Knoxville, TN

Shipments

All orders should specify method of shipment. In the absence of instructions, shipments will be made at the company's discretion. If special routing is desired, this should be stated. If post office and shipping point addresses differ, both should be given. Orders are accepted with the express understanding that Morris Coupling Company will not be liable for any losses or damages resulting from any delays in shipment or delivery due to any cause whatsoever.

Orders, Contracts and Agreements

All orders and contracts taken by representatives of agents, or received direct, are subject to acceptance by the company at Erie, Pennsylvania.

Quotations

All quotations are valid for acceptance within 30 days unless otherwise noted.

Minimum Order

The net minimum billing is $50.00.

Returned Material

No merchandise can be returned without prior consent of the company. All returned shipments must be accompanied with a completed Customer Return Authorization form clearly identifying the name and address of the sender. In the event any material is returned for credit, a restocking charge will be made, plus a charge for reconditioning where necessary. All products being returned must be new and in resaleable condition.

Special Products or Material

All non-stock items and special products or materials are not returnable.

Warranty


We warrant the goods to be free from defects in material and workmanship as represented in our catalogs or applicable drawings and specifications agreed to by us at the time of acceptance of the order by Morris Coupling Company. Our obligation under this warranty shall be limited to repairing or replenishing any parts which shall, within one (1) year after shipment to the original purchaser, be demonstrated to be defective. This warranty is expressly in lieu of all other warranties, express or implied, including the warranties of merchantability and fitness for application. No person, firm or corporation is authorized to assume for us any other liability in connection with the sale of these goods.

Prices subject to change without notice.

©2026 Morris Coupling Company

Printed in U.S.A.


Compression Couplings For Tubing And Pipe

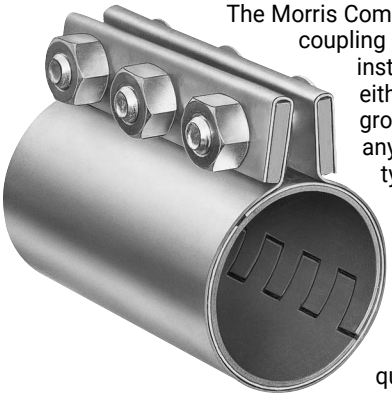

The Morris Compression tubing and pipe coupling is designed for permanent installation in the joining of either plain end, threaded, grooved or a combination of any of these joints. The band type construction holds the entire surface of the joint in uniform compression.

Couplings are made of heavy-gauge zinc-plated steel (prices of aluminum or stainless-steel couplings quoted on request).

Gaskets furnished standard in red rubber or black neoprene, please specify. Gaskets also available in white neoprene and a variety of other materials at a slight extra charge.

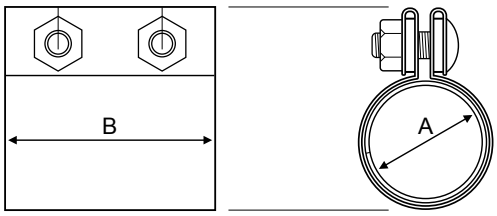

Condensed Table Of Specifications

Size	Thickness		
	Shell	Sleeve	Gasket
1/2" - 2-7/8" OD	.052	.052	.062
3" OD	.052	.052	.093
3-1/4" - 5" OD	.062	.052	.093
5-1/4" - 8-5/8" OD	.062	.052	.125
9" - 24" OD	.062	.062	.125

Tubing or Nom. Pipe (IPS) Size	O.D. Tubing Pipe (A)	Morris Coupling Code	Coupling Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE (2)			
							BLACK Gasket*		WHITE Gasket*	
							PIC No.	Price (1)	PIC No.	Price
1/2" Pipe	0.840	1/2-2C	2"	2	5/16 x 1-1/4	0.5	0100842B2	36.40	0100842W2	37.10
3/4" Pipe	1.050	3/4-2C	2"	2	5/16 x 1-1/4	0.7	0101052B2	37.10	0101052W2	37.60
1" Tubing	1.000	1-2C-OD	2"	2	5/16 x 1-1/4	1.6	0101002B2	36.70	0101002W2	37.30
1" Pipe	1.315	1-2C	4"	2	1/2 x 1-3/4	1.6	0101312B2	19.05	0101312W2	19.65
1-1/4" Tubing	1.250	1-1/4-2C-OD	4"	2	1/2 x 1-3/4	1.9	0101252B2	18.30	0101252W2	19.05
1-1/4" Pipe	1.660	1-1/4-2C	4"	2	1/2 x 1-3/4	1.8	0101662B2	17.60	0101662W2	18.55
	1.660	1-1/4-3C	6"	3	1/2 x 1-3/4	3.0	0101663B2	22.55	0101663W2	23.50
1-1/2" Tubing	1.500	1-1/2-2C-OD	4"	2	1/2 x 1-3/4	2.0	0101502B2FG	17.25	0101502W2	17.85
	1.500	1-1/2-3C-OD	6"	3	1/2 x 1-3/4	2.9	0101503B2FG	21.10	0101503W2	21.95
1-1/2" Pipe	1.900	1-1/2-2C	4"	2	1/2 x 1-3/4	2.0	0101902B2	17.85	0101902W2	19.15
	1.900	1-1/2-3C	6"	3	1/2 x 1-3/4	3.1	0101903B2	22.55	0101903W2	23.50
1-3/4" Tubing	1.750	1-3/4-2C-OD	4"	2	1/2 x 1-3/4	2.1	0101752B2FG	17.60	0101752W2	18.55
	1.750	1-3/4-3C-OD	6"	3	1/2 x 1-3/4	3.0	0101753B2FG	21.95	0101753W2	23.10
2" Tubing	2.000	2-2C-OD	4"	2	1/2 x 1-3/4	2.1	0102002B2FG	17.85	0102002W2	19.15
	2.000	2-3C-OD	6"	3	1/2 x 1-3/4	3.1	0102003B2FG	23.10	0102003W2FG	23.85
2" Pipe	2.375	2-2C	4"	2	1/2 x 1-3/4	2.2	0102372B2	19.85	0102372W2FG	21.10
	2.375	2-3C	6"	3	1/2 x 1-3/4	3.5	0102373B2FG	24.90	0102373W2FG	25.65
	2.375	2-4C	8"	4	1/2 x 1-3/4	4.7	0102374B2	30.70	0102374W2	32.05
2-1/8" Tubing	2.125	2-1/8-2C-OD	4"	2	1/2 x 1-3/4	2.1	0102122B2	18.30	0102122W2	19.15
	2.125	2-1/8-3C-OD	6"	3	1/2 x 1-3/4	3.2	0102123B2FG	23.50	0102123W2	24.90
2-3/16" Tubing	2.187	2-3/16-2C-OD	4"	2	1/2 x 1-3/4	2.2	0102182B2FG	18.55	0102182W2	20.90
	2.187	2-3/16-3C-OD	6"	3	1/2 x 1-3/4	3.3	0102183B2FG	23.85	0102183W2	24.90
2-1/4" Tubing	2.250	2-1/4-2C-OD	4"	2	1/2 x 1-3/4	2.2	0102252B2	19.65	0102252W2	20.25
	2.250	2-1/4-3C-OD	6"	3	1/2 x 1-3/4	3.3	0102253B2FG	23.85	0102253W2	25.40
2-1/2" Tubing	2.500	2-1/2-2C-OD	4"	2	1/2 x 1-3/4	2.6	0102502B2FG	20.25	0102502W2	21.35
	2.500	2-1/2-3C-OD	6"	3	1/2 x 1-3/4	3.4	0102503B2FG	24.90	0102503W2FG	26.45
2-1/2" Pipe	2.875	2-1/2-2C	4"	2	1/2 x 1-3/4	2.4	0102872B2	20.25	0102872W2	21.35
	2.875	2-1/2-3C	6"	3	1/2 x 1-3/4	3.7	0102873B2FG	25.65	0102873W2	27.30
	2.875	2-1/2-4C	8"	4	1/2 x 1-3/4	5.0	0102874B2	32.05	0102874W2	34.00
2-3/4" Tubing	2.750	2-3/4-3C-OD	6"	3	1/2 x 1-3/4	3.6	0102753B2	25.40	0102753W2	27.15
3" Tubing	3.000	3-2C-OD	4"	2	5/8 x 2	3.2	0103002B2FG	22.55	0103002W2	23.50
	3.000	3-3C-OD	6"	3	5/8 x 2	4.5	0103003B2FG	26.45	0103003W2FG	28.75
	3.000	3-4C-OD	8"	4	5/8 x 2	5.9	0103004B2FG	35.70	0103004W2FG	38.75
3" Pipe	3.500	3-2C	4"	2	5/8 x 2	3.4	0103502B2	23.50	0103502W2	24.90
	3.500	3-3C	6"	3	5/8 x 2	5.1	0103503B2FG	29.75	0103503W2FG	31.95
	3.500	3-4C	8"	4	5/8 x 2	6.6	0103504B2FG	37.60	0103504W2FG	40.30
3-1/4" Tubing	3.250	3-1/4-2C-OD	4"	2	5/8 x 2	3.5	0103252B2	23.10	0103252W2	25.95
	3.250	3-1/4-3C-OD	6"	3	5/8 x 2	5.0	0103253B2	27.45	0103253W2	30.15
	3.250	3-1/4-4C-OD	8"	4	5/8 x 2	6.5	0103254B2	36.70	0103254W2	40.00
3-1/2" Tubing	3.500	3-2C	4"	2	5/8 x 2	3.4	0103502B2	23.50	0103502W2	24.90
	3.500	3-3C	6"	3	5/8 x 2	5.1	0103503B2FG	29.75	0103503W2FG	31.95
	3.500	3-4C	8"	4	5/8 x 2	6.6	0103504B2FG	37.60	0103504W2FG	40.30

- WHEN ORDERING, always give the Code No. and O.D. of the pipe or tube on which coupling will be used.
- Prices for larger and/or special sizes available on request.

NOTE: When ordering GASKETS ONLY, please refer to page 6.

*Neoprene

(1) Same price applies for couplings with red rubber gaskets.

(2) Stainless steel grounding strips are standard on all couplings. Aluminum grounding strips or couplings without grounding strips available at same price.

For Prices and Delivery

Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Compression Couplings For Tubing And Pipe continued



To Prevent Static Electricity Build-up in Bulk Material Conveying Systems, specify Morris Compression Couplings with grounding strips. Be sure to state if your requirements call for aluminum or stainless steel strips. Stainless steel grounding strips are standard, aluminum grounding strips or couplings without grounding strips are available at the same price.

To Eliminate Gasket Wear, or contamination of material flowing through the system lines, specify Couplings with Stainless Steel GASKET PROTECTORS. (For prices, see page 4.)

Tubing or Nom. Pipe (IPS) Size	O.D. Tubing Pipe (A)	Morris Coupling Code	Coupling Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE (2)			
							BLACK Gasket*		WHITE Gasket*	
							PIC No.	Price (1)	PIC No.	Price
3-1/2" PIPE	4.000	3-1/2-2C	4"	2	5/8 x 2	3.7	0104002B2FG	24.90	0104002W2	26.45
	4.000	3-1/2-3C	6"	3	5/8 x 2	5.3	0104003B2FG	32.05	0104003W2FG	35.25
	4.000	3-1/2-4C	8"	4	5/8 x 2	7.2	0104004B2FG	39.15	0104004W2FG	43.15
3-3/4" Tubing	3.750	3-3/4-3C-OD	6"	3	5/8 x 2	5.6	0103753B2	30.70	0103753W2	33.25
	3.750	3-3/4-4C-OD	8"	4	5/8 x 2	7.4	0103754B2	37.60	0103754W2	41.10
4" Tubing	4.000	3-1/2-2C	4"	2	5/8 x 2	3.7	0104002B2FG	24.90	0104002W2	26.45
	4.000	3-1/2-3C	6"	3	5/8 x 2	5.3	0104003B2FG	32.05	0104003W2FG	35.25
	4.000	3-1/2-4C	8"	4	5/8 x 2	7.2	0104004B2FG	39.15	0104004W2FG	43.15
4" Pipe	4.500	4-2C	4"	2	5/8 x 2	3.8	0104502B2	26.75	0104502W2	28.75
	4.500	4-3C	6"	3	5/8 x 2	5.5	0104503B2FG	34.00	0104503W2FG	37.10
	4.500	4-4C	8"	4	5/8 x 2	7.7	0104504B2FG	42.20	0104504W2FG	46.45
4-1/4" Tubing	4.250	4-1/4-3C-OD	6"	3	5/8 x 2	5.5	0104253B2	33.10	0104253W2	35.90
	4.250	4-1/4-4C-OD	8"	4	5/8 x 2	7	0104254B2	40.00	0104254W2	44.20
4-1/2" Tubing	4.500	4-2C	4"	2	5/8 x 2	3.8	0104502B2	26.75	0104502W2	28.75
	4.500	4-3C	6"	3	5/8 x 2	5.5	0104503B2FG	34.00	0104503W2FG	37.10
	4.500	4-4C	8"	4	5/8 x 2	7.7	0104504B2FG	42.20	0104504W2FG	46.45
4-1/2" Pipe	5.000	4-1/2-2C	4"	2	5/8 x 2	4.2	0105002B2	28.75	0105002W2	31.70
	5.000	4-1/2-3C	6"	3	5/8 x 2	6.2	0105003B2FG	36.40	0105003W2FG	40.00
	5.000	4-1/2-4C	8"	4	5/8 x 2	8.1	0105004B2FG	45.55	0105004W2FG	50.45
4-3/4" Tubing	4.750	4-3/4-3C-OD	6"	3	5/8 x 2	6.5	0104753B2	35.90	0104753W2	39.15
	4.750	4-3/4-4C-OD	8"	4	5/8 x 2	8.6	0104754B2	44.20	0104754W2	48.60
5" Tubing	5.000	4-1/2-2C	4"	2	5/8 x 2	4.2	0105002B2	28.75	0105002W2	31.70
	5.000	4-1/2-3C	6"	3	5/8 x 2	6.2	0105003B2FG	36.40	0105003W2FG	40.00
	5.000	4-1/2-4C	8"	4	5/8 x 2	8.1	0105004B2FG	45.55	0105004W2FG	50.45
5" Pipe	5.563	5-2C	4"	2	5/8 x 2	4.6	0105562B2	32.05	0105562W2	35.90
	5.563	5-3C	6"	3	5/8 x 2	6.8	0105563B2FG	40.00	0105563W2FG	44.55
	5.563	5-4C	8"	4	5/8 x 2	8.8	0105564B2FG	49.70	0105564W2FG	56.45
5-1/4" Tubing	5.250	5-1/4-3C-OD	6"	3	5/8 x 2	6.6	0105253B2	37.30	0105253W2	42.20
5-1/2" Tubing	5.500	5-1/2-3C-OD	6"	3	5/8 x 2	6.8	0105503B2	38.95	0105503W2	43.90
	5.500	5-1/2-4C-OD	8"	4	5/8 x 2	9	0105504B2	48.90	0105504W2	55.20
5-3/4" Tubing	5.750	5-3/4-3C-OD	6"	3	5/8 x 2	7.8	0105753B2	41.95	0105753W2	46.45
	5.750	5-3/4-4C-OD	8"	4	5/8 x 2	9.2	0105754B2	50.45	0105754W2	56.45
6" Tubing	6.000	6-2C-OD	4"	2	5/8 x 2	4.7	0106002B2FG	33.10	0106002W2	37.10
	6.000	6-3C-OD	6"	3	5/8 x 2	7	0106003B2FG	42.80	0106003W2FG	48.05
	6.000	6-4C-OD	8"	4	5/8 x 2	9.4	0106004B2FG	51.20	0106004W2FG	57.20
	6.000	6-5C-OD	10"	5	5/8 x 2	11.8	0106005B2	67.85	0106005W2	76.80
6" Pipe	6.625	6-2C	4"	2	5/8 x 2	5.3	0106622B2	35.25	0106622W2	39.15
	6.625	6-3C	6"	3	5/8 x 2	7.8	0106623B2FG	44.55	0106623W2	50.45
	6.625	6-4C	8"	4	5/8 x 2	10.4	0106624B2FG	55.20	0106624W2FG	62.90
	6.625	6-5C	10"	5	5/8 x 2	14.3	0106625B2	70.90	0106625W2	80.25
6-1/4" Tubing	6.250	6-1/4-3C-OD	6"	3	5/8 x 2	7.3	0106253B2	43.30	0106253W2	49.55
	6.250	6-1/4-4C-OD	8"	4	5/8 x 2	10	0106254B2	52.50	0106254W2	59.40
6-1/2" Tubing	6.500	6-1/2-3C-OD	6"	3	5/8 x 2	7.5	0106503B2	44.20	0106503W2	49.70
	6.500	6-1/2-4C-OD	8"	4	5/8 x 2	10.4	0106504B2	54.65	0106504W2	62.00
6-3/4" Tubing	6.750	6-3/4-3C-OD	6"	3	5/8 x 2	7.7	0106753B2	47.55	0106753W2	53.55
	6.750	6-3/4-4C-OD	8"	4	5/8 x 2	10.8	0106754B2	56.25	0106754W2	63.75
7" Tubing	7.000	7-3C-OD	6"	3	5/8 X 2	7.9	0107003B2	50.45	0107003W2	56.25
	7.000	7-4C-OD	8"	4	5/8 X 2	10.8	0107004B2	58.35	0107004W2	65.85
	7.000	7-5C-OD	10"	5	5/8 X 2	13.7	0107005B2	75.75	0107005W2	85.05
7-1/4" Tubing	7.250	7-1/4-3C-OD	6"	3	5/8 x 2	8.3	0107253B2	52.05	0107253W2	58.85
7-1/2" Tubing	7.500	7-1/2-3C-OD	6"	3	5/8 x 2	8.5	0107503B2	53.30	0107503W2	59.80
	7.500	7-1/2-4C-OD	8"	4	5/8 x 2	11.3	0107504B2	60.70	0107504W2	68.95
7-3/4" Tubing	7.750	7-3/4-3C-OD	6"	3	5/8 x 2	8.9	0107753B2	55.20	0107753W2	62.25
8" Tubing	8.000	8-2C-OD	6"	2	3/4 x 3	11	0108002B2	61.00	0108002W2	67.75
	8.000	8-3C-OD	8"	3	3/4 x 3	14.3	0108003B2FG	77.75	0108003W2	87.50
	8.000	8-4C-OD	10"	4	3/4 x 3	18	0108004B2FG	94.25	0108004W2	106.20
	8.000	8-5C-OD	12"	5	3/4 x 3	22	0108005B2	111.55	0108005W2	126.35
8" Pipe	8.625	8-2C	6"	2	3/4 x 3	11.5	0108622B2	62.00	0108622W2	69.25
	8.625	8-3C	8"	3	3/4 x 3	14.6	0108623B2	78.65	0108623W2	89.10
	8.625	8-4C	10"	4	3/4 x 3	18.8	0108624B2FG	95.85	0108624W2FG	109.10
	8.625	8-5C	12"	5	3/4 x 3	23	0108625B2	114.40	0108625W2	131.95
9" Tubing	9.000	9-3C-OD	8"	3	3/4 x 3	15.9	0109003B2	87.50	0109003W2	98.15
	9.000	9-4C-OD	10"	4	3/4 x 3	19.9	0109004B2	104.40	0109004W2	117.85

• *WHEN ORDERING, always give the Code No. and O.D. of the pipe or tube on which coupling will be used.*
(1) Same price applies for couplings with red rubber gaskets. All prices shown are F.O.B. Erie, PA – prices subject to change without notice.
(2) Stainless steel grounding strips are standard on all couplings. Aluminum grounding strips or couplings without grounding strips available at same price.

Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.

Compression Couplings For Tubing And Pipe continued


Tubing or Nom. Pipe (IPS) Size	O.D. Tubing Pipe (A)	Morris Coupling Code	Coupling Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE (2)			
							BLACK Gasket*		WHITE Gasket*	
							PIC No.	Price (1)	PIC No.	Price
10" Tubing	10.000	10-3C-OD	8"	3	3/4 x 3	17.5	0110003B2	95.40	0110003W2	107.75
	10.000	10-4C-OD	10"	4	3/4 x 3	21.8	0110004B2FG	114.00	0110004W2	128.75
	10.000	10-5C-OD	12"	5	3/4 x 3	26.1	0110005B2	131.95	0110005W2	148.55
10" Pipe	10.750	10-3C	8"	3	3/4 x 3	16.4	0110753B2	95.85	0110753W2	109.10
	10.750	10-4C	10"	4	3/4 x 3	20.3	0110754B2	115.75	0110754W2	131.45
	10.750	10-5C	12"	5	3/4 x 3	25.2	0110755B2	137.70	0110755W2	155.25
12" Tubing	12.000	12-3C-OD	8"	3	3/4 x 3	20.4	0112003B2	121.80	0112003W2	133.65
	12.000	12-4C-OD	10"	4	3/4 x 3	25.5	0112004B2	142.15	0112004W2	159.70
	12.000	12-5C-OD	12"	5	3/4 x 3	30.2	0112005B2	167.30	0112005W2	188.05
12" Pipe	12.750	12-3C	8"	3	3/4 x 3	18.7	0112753B2	124.15	0112753W2	139.70
	12.750	12-4C	10"	4	3/4 x 3	23.3	0112754B2	145.40	0112754W2	162.80
	12.750	12-5C	12"	5	3/4 x 3	28.1	0112755B2	172.00	0112755W2	193.50
13" Tubing	13.000	13-3C-OD	8"	3	3/4 x 3	21.8	0113003B2	152.55	0113003W2	170.45
	13.000	13-4C-OD	10"	4	3/4 x 3	26.8	0113004B2	176.70	0113004W2	197.85
	13.000	13-5C-OD	12"	5	3/4 x 3	32.6	0113005B2	205.00	0113005W2	229.75
14" Tubing/Pipe	14.000	14-3C-OD	8"	3	3/4 x 3	22.9	0114003B2	174.90	0114003W2	194.75
	14.000	14-4C-OD	10"	4	3/4 x 3	27.6	0114004B2	201.25	0114004W2	225.60
	14.000	14-5C-OD	12"	5	3/4 x 3	34.2	0114005B2	224.55	0114005W2	251.25
	14.000	14-6C-OD	16"	6	3/4 x 3	45	0114006B2	270.85	0114006W2	307.55
15" Tubing/Pipe	15.000	15-3C-OD	8"	3	3/4 x 3	24	0115003B2	196.50	0115003W2	218.95
	15.000	15-4C-OD	10"	4	3/4 x 3	29.6	0115004B2	213.55	0115004W2	239.05
	15.000	15-5C-OD	12"	5	3/4 x 3	35.9	0115005B2	245.40	0115005W2	274.30
	15.000	15-6C-OD	16"	6	3/4 x 3	48	0115006B2	290.95	0115006W2	328.45
16" Tubing/Pipe	16.000	16-3C-OD	8"	3	3/4 x 3	25.3	0116003B2	220.10	0116003W2	243.60
	16.000	16-4C-OD	10"	4	3/4 x 3	31.1	0116004B2	250.65	0116004W2	279.85
	16.000	16-5C-OD	12"	5	3/4 x 3	37.8	0116005B2	269.95	0116005W2	301.90
	16.000	16-6C-OD	16"	6	3/4 x 3	49.5	0116006B2	321.05	0116006W2	361.60
18" Tubing/Pipe	18.000	18-4C-OD	10"	4	3/4 x 3	34.7	0118004B2	277.35	0118004W2	307.70
	18.000	18-5C-OD	12"	5	3/4 x 3	41.9	0118005B2	295.80	0118005W2	332.25
	18.000	18-6C-OD	16"	6	3/4 x 3	54.9	0118006B2	342.20	0118006W2	387.15
20" Tubing/Pipe	20.000	20-5C-OD	12"	5	3/4 x 3	45.6	0120005B2	325.10	0120005W2	370.55
	20.000	20-6C-OD	16"	6	3/4 x 3	59.5	0120006B2	371.40	0120006W2	421.30
22" Tubing/Pipe	22.000	22-5C-OD	12"	5	3/4 x 3	48.9	0122005B2	368.05	0122005W2	414.40
	22.000	22-6C-OD	16"	6	3/4 x 3	64.4	0122006B2	415.90	0122006W2	469.80
24" Tubing/Pipe	24.000	24-5C-OD	12"	5	3/4 x 3	52.1	0124005B2	428.45	0124005W2	477.40
	24.000	24-6C-OD	16"	6	3/4 x 3	68.6	0124006B2	476.10	0124006W2	543.40

- WHEN ORDERING, always give the Code No. and O.D. of the pipe or tube on which coupling will be used.
- Overall height of coupling, including flange, is coupling O.D. plus 2-3/4".

(1) Same price applies for couplings with red rubber gaskets.

(2) Stainless steel grounding strips are standard on all couplings. Aluminum grounding strips or couplings without grounding strips available at same price.

*Neoprene



Dual-Purpose Couplings For Tubing And Pipe

When higher pressures or applications requiring greater end-pull capabilities are encountered, these dual-flange couplings are recommended. Gasket is one piece with single row of interlocking teeth as illustrated. The outer shell with flanges and the inner sleeve are two pieces each. Dual- Purpose Couplings slide to position at the joint without removing the bolts, or may be separated into halves for assembly around the joint.

Tubing or Nom. Pipe (IPS) Size	O.D. Tubing Pipe (A)	Morris Coupling Code	Coupling Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE			
							BLACK Gasket*		WHITE Gasket*	
							PIC No.	Price	PIC No.	Price
20" Tubing/Pipe	20.000	20-5C-OD DP	12"	10	3/4 x 3	54.8	0820005B2	434.55	0820005W2	486.65
	20.000	20-6C-OD DP	16"	12	3/4 x 3	72.9	0820006B2	516.15	0820006W2	578.15
22" Tubing/Pipe	22.000	22-5C-OD DP	12"	10	3/4 x 3	57.8	0822005B2	454.30	0822005W2	521.80
	22.000	22-6C-OD DP	16"	12	3/4 x 3	76.6	0822006B2	571.50	0822006W2	647.55
24" Tubing/Pipe	24.000	24-5C-OD DP	12"	10	3/4 x 3	61.2	0824005B2	499.45	0824005W2	576.85
	24.000	24-6C-OD DP	16"	12	3/4 x 3	81.3	0824006B2	595.85	0824006W2	684.95
26" Tubing/Pipe	26.000	26-5C-OD DP	12"	10	3/4 x 3	64.5	0826005B2	521.50	0826005W2	598.85
	26.000	26-6C-OD DP	16"	12	3/4 x 3	85.8	0826006B2	629.05	0826006W2	721.30
28" Tubing/Pipe	28.000	28-5C-OD DP	12"	10	3/4 x 3	67.8	0828005B2	566.55	0828005W2	643.25
	28.000	28-6C-OD DP	16"	12	3/4 x 3	93.1	0828006B2	683.50	0828006W2	762.95

- WHEN ORDERING, always give the Code No. and O.D. of the pipe or tube on which coupling will be used.
- Dimensions of couplings to outside edges of flanges is coupling O.D. plus 5-1/2".

All prices shown are F.O.B. Erie, PA – prices subject to change without notice.

PRICES FOR SIZES NOT SHOWN WILL BE QUOTED ON REQUEST.

*Neoprene.

For Prices and Delivery

Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Compression Couplings with Stainless-Steel Gasket Protectors

You can eliminate costly downtime and replacement of coupling gaskets in your vacuum conveying system.

Morris Gasket Protectors provide positive gasket protection against abrasion or corrosion with no adverse effect on Coupling capabilities. They prevent gasket wear which occurs when pipe or tubing ends do not butt completely. This gap is often unavoidable and always undetectable. In vacuum systems, gaskets without Protectors can be drawn into the line enough to cause excessive wear and eventual system leaks. This may result in undesirable contamination of the materials being handled.

Morris Couplings with Gasket Protectors fully eliminate these costly hazards to the effective and economical operation of vacuum conveying systems.

- Are factory assembled – no loose parts.
- Automatically compensate for field installation variations causing exposure of gaskets – prevent pinched gaskets at butt connections.
- Gasket Protectors are of Type 430 stainless steel with interlocking teeth – excellent for protection against abrasion and corrosion.
- For special corrosive applications, specify Teflon Gasket Protectors*.


Gasket Protectors are for use with Morris Compression Couplings only and are not recommended for couplings less than 6" long.

For Couplings with Gasket Protectors in sizes not listed at right, contact the factory.

All shipments are F.O.B. Erie, PA.

Prices subject to change without notice.

TO ORDER:
Order by Code No. and O.D. Specify “WITH STAINLESS STEEL GASKET PROTECTOR.”

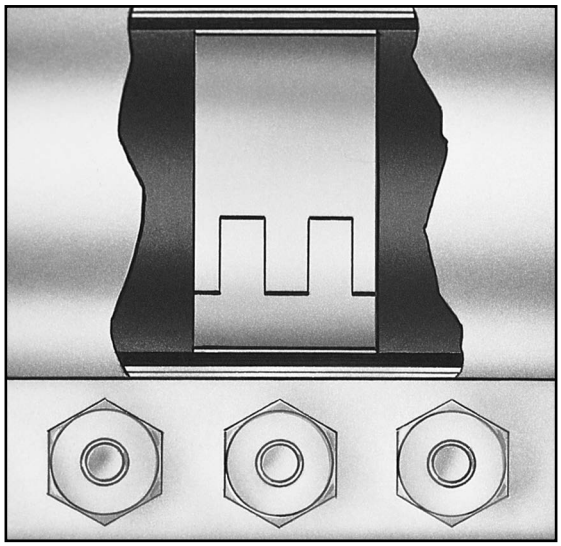

O.D. of Tubing or Pipe Size (in.)	Morris Coupling Code	LIST PRICE			
		BLACK Gasket*		WHITE Gasket*	
		PIC No.	Price(1)	PIC No.	Price
1.500	1-1/2-3C OD	0101503B3FG	23.50	0101503W3	24.10
1.900	1-1/2-3C	0101903B3	25.00	0101903W3	26.30
1.750	1-3/4-3C OD	0101753B3FG	24.90	0101753W3	25.75
2.000	2-3C OD	0102003B3FG	25.40	0102003W3	26.45
2.187	2-3/16-3C OD	0102183B3FG	26.75	0102183W3	27.30
2.250	2-1/4-3C OD	0102253B3FG	26.95	0102253W3	27.45
2.375	2-3C	0102373B3FG	27.30	0102373W3	28.75
2.500	2-1/2-3C OD	0102503B3FG	27.70	0102503W3	29.55
2.875	2-1/2-3C	0102873B3	29.10	0102873W3	30.30
3.000	3-3C OD	0103003B3FG	29.90	0103003W3	32.25
	3-4C OD	0103004B3	39.55	0103004W3	42.70
3.500	3-3C	0103503B3FG	32.55	0103503W3	35.35
	3-4C	0103504B3	41.95	0103504W3	44.95
4.000	3-1/2-3C	0104003B3FG	36.10	0104003W3	39.45
	3-1/2-4C	0104004B3FG	43.90	0104004W3	48.05
4.500	4-3C	0104503B3FG	39.25	0104503W3	42.35
	4-4C	0104504B3	47.90	0104504W3	52.20
5.000	4-1/2-3C	0105003B3	42.20	0105003W3	45.30
	4-1/2-4C	0105004B3	51.20	0105004W3	56.45
5.563	5-3C	0105563B3	45.75	0105563W3	50.05
	5-4C	0105564B3	56.25	0105564W3	62.90
6.000	6-3C OD	0106003B3	48.45	0106003W3	54.95
	6-4C OD	0106004B3	57.70	0106004W3	64.40
6.625	6-3C	0106623B3	50.45	0106623W3	56.65
	6-4C	0106624B3	62.25	0106624W3	70.40
8.000	8-3C OD	0108003B3	88.45	0108003W3	101.60
	8-4C OD	0108004B3	105.70	0108004W3	118.15
8.625	8-3C	0108623B3	90.15	0108623W3	100.85
	8-4C	0108624B3	107.90	0108624W3	121.45
10.000	10-3C OD	0110003B3	108.95	0110003W3	121.80
	10-4C OD	0110004B3	127.50	0110004W3	143.70
	10-5C OD	0110005B3	146.85	0110005W3	164.80
10.750	10-3C	0110753B3	110.05	0110753W3	122.90
	10-4C	0110754B3	130.60	0110754W3	146.85
	10-5C	0110755B3	152.55	0110755W3	183.75
12.000	12-3C OD	0112003B3	132.60	0112003W3	148.15
	12-4C OD	0112004B3	152.55	0112004W3	170.45
	12-5C OD	0112005B3	177.90	0112005W3	188.05
12.750	12-3C	0112753B3	134.85	0112753W3	151.05
	12-4C	0112754B3	156.60	0112754W3	173.85
	12-5C	0112755B3	182.80	0112755W3	204.80

(1) Same price applies for couplings with red rubber gaskets.
**Contact factory for prices of couplings with Teflon gasket protectors.*

©2026 Morris Coupling Company

Side-Band Compression Couplings



The unique design of the Morris Side-Band Compression Coupling provides improved axial-force capability when connecting pipe and tubing. Side-band couplings are especially effective where line vibration is a problem.

The side-band coupling provides all the sealing advantages of the Morris compression coupling while providing enhanced end-pull capability.

Available for 1-1/2" through 24" nominal pipe or tubing sizes. Static grounding strips and stainless-steel gasket protectors also available.

O.D. of Tubing or Pipe Size (in.)	Morris Coupling Code	Weight Each (lbs.)	LIST PRICE (2)			
			BLACK Gasket*		WHITE Gasket*	
			PIC No.	Price(1)	PIC No.	Price
2.000	2-3C-OD-SB	7.3	3102003B0	97.45	3102003W0	98.55
2.375	2-3C-SB	7.7	3102373B0	99.10	3102373W0	100.20
2.500	2-1/2-3C-OD-SB	8.1	3102503B0	100.20	3102503W0	101.60
2.875	2-1/2-3C-SB	8.7	3102873B0	102.85	3102873W0	104.20
3.000	3-3C-OD-SB	9.2	3103003B0	105.40	3103003W0	107.60
	3-4C-OD-SB	10.1	3103004B0	115.20	3103004W0	118.45
3.500	3-3C-SB	9.8	3103503B0	107.60	3103503W0	110.05
	3-4C-SB	10.7	3103504B0	119.20	3103504W0	121.75
4.000	3-1/2-3C-SB	10.3	3104003B0	110.55	3104003W0	113.70
	3-1/2-4C-SB	12.9	3104004B0	122.90	3104004W0	126.60
4.500	4-3C-SB	10.7	3104503B0	112.65	3104503W0	115.75
	4-4C-SB	13.4	3104504B0	124.80	3104504W0	128.90
5.000	4-1/2-3C-SB	11.4	3105003B0	114.40	3105003W0	118.35
	4-1/2-4C-SB	14.1	3105004B0	128.20	3105004W0	133.30
5.563	5-3C-SB	12.3	3105563B0	116.45	3105563W0	120.80
	5-4C-SB	15	3105564B0	131.55	3105564W0	138.20
6.000	6-3C-OD-SB	12.5	3106003B0	118.85	3106003W0	124.15
	6-4C-OD-SB	15.6	3106004B0	133.30	3106004W0	139.35
6.625	6-3C-SB	13.5	3106623B0	120.45	3106623W0	127.00
	6-4C-SB	16.9	3106624B0	135.45	3106624W0	143.10
8.000	8-3C-OD-SB	24.8	3108003B0	173.85	3108003W0	183.60
	8-4C-OD-SB	28.5	3108004B0	198.45	3108004W0	210.45
8.625	8-3C-SB	25.6	3108623B0	177.60	3108623W0	188.75
	8-4C-SB	29.8	3108624B0	202.50	3108624W0	216.35
10.000	10-3C-OD-SB	29.2	3110003B0	191.45	3110003W0	204.25
	10-4C-OD-SB	33.5	3110004B0	224.25	3110004W0	234.25
10.750	10-3C-SB	28.1	3110753B0	195.90	3110753W0	209.70
	10-4C-SB	32	3110754B0	227.25	3110754W0	243.35
12.000	12-3C-OD-SB	32.1	3112003B0	219.30	3112003W0	231.25
	12-4C-OD-SB	37	3112004B0	251.90	3112004W0	268.85
12.750	12-3C-SB	32.7	3112753B0	225.45	3112753W0	238.40
	12-4C-SB	37.9	3112754B0	257.85	3112754W0	274.80

(1) Same price applies for couplings with red rubber gaskets. **Neoprene*

(2) Stainless steel or aluminum grounding strips are available at same price.

- *WHEN ORDERING, always give the Code No. and O.D. of the pipe or tube on which coupling will be used.*
- *Contact factory for prices of couplings with Teflon gasket protectors.*
- *Prices for larger and/or special sizes available on request.*

Note: For Side-Band coupling length, add 8 inches to basic coupling length.

For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Replacement Gaskets

Gaskets For Compression Couplings For Tubing and Pipe

Tubing or Nom. Pipe (IPS) Size	O.D. Tubing Pipe	Morris Coupling Code	LIST PRICE BLACK Gasket* PIC No.	BLACK Gasket* Price (1)	WHITE Gasket* PIC No.	WHITE Gasket* Price
1/2" Pipe	0.840	1/2-2C	3500842B0	2.35	3500842W0	2.85
3/4" Pipe	1.050	3/4-2C	3501052B0	2.85	3501052W0	3.25
1" Tubing	1.000	1-2C-OD	3501002B0	3.70	3501002W0	4.05
1" Pipe	1.315	1-2C	3501312B0	3.95	3501312W0	4.60
1-1/4" Tubing	1.250	1-1/4-2C-OD	3501252B0	3.80	3501252W0	4.50
1-1/4" Pipe	1.660	1-1/4-2C	3501662B0	4.05	3501662W0	5.15
	1.660	1-1/4-3C	3501663B0	5.45	3501663W0	6.30
1-1/2" Tubing	1.500	1-1/2-2C-OD	3501502B0	4.05	3501502W0	4.60
	1.500	1-1/2-3C-OD	3501503B0	5.45	3501503W0	6.30
1-1/2" Pipe	1.900	1-1/2-2C	3501902B0	4.50	3501902W0	5.45
	1.900	1-1/2-3C	3501903B0	6.15	3501903W0	6.85
1-3/4" Tubing	1.750	1-3/4-2C-OD	3501752B0	4.50	3501752W0	5.15
	1.750	1-3/4-3C-OD	3501753B0	5.45	3501753W0	6.85
2" Tubing	2.000	2-2C-OD	3502002B0	4.60	3502002W0	5.45
	2.000	2-3C-OD	3502003B0	6.15	3502003W0	7.20
2" Pipe	2.375	2-2C	3502372B0	5.45	3502372W0	6.30
	2.375	2-3C	3502373B0	6.30	3502373W0	7.75
	2.375	2-4C	3502374B0	7.75	3502374W0	10.50
2-1/8" Tubing	2.125	2-1/8-2C-OD	3502122B0	5.15	3502122W0	6.15
	2.125	2-1/8-3C-OD	3502123B0	6.15	3502123W0	7.20
2-3/16" Tubing	2.187	2-3/16-2C-OD	3502182B0	5.45	3502182W0	6.30
	2.187	2-3/16-3C-OD	3502183B0	6.30	3502183W0	7.60
2-1/4" Tubing	2.250	2-1/4-2C-OD	3502252B0	5.45	3502252W0	6.30
	2.250	2-1/4-3C-OD	3502253B0	6.30	3502253W0	7.75
2-1/2" Tubing	2.500	2-1/2-2C-OD	3502502B0	5.45	3502502W0	6.85
	2.500	2-1/2-3C-OD	3502503B0	7.20	3502503W0	9.15
2-1/2" Pipe	2.875	2-1/2-2C	3502872B0	6.30	3502872W0	7.20
	2.875	2-1/2-3C	3502873B0	7.75	3502873W0	9.60
	2.875	2-1/2-4C	3502874B0	10.00	3502874W0	10.80
2-3/4" Tubing	2.750	2-3/4-3C-OD	3502753B0	7.20	3502753W0	9.60
3" Tubing	3.000	3-2C-OD	3503002B0	6.85	3503002W0	8.45
	3.000	3-3C-OD	3503003B0	8.45	3503003W0	10.00
	3.000	3-4C-OD	3503004B0	10.50	3503004W0	12.25
3" Pipe	3.500	3-2C	3503502B0	7.20	3503502W0	9.15
	3.500	3-3C	3503503B0	9.15	3503503W0	11.05
	3.500	3-4C	3503504B0	10.80	3503504W0	13.05
3-1/4" Tubing	3.250	3-1/4-2C-OD	3503252B0	7.20	3503252W0	8.45
	3.250	3-1/4-3C-OD	3503253B0	8.45	3503253W0	10.50
	3.250	3-1/4-4C-OD	3503254B0	10.80	3503254W0	13.05
3-1/2" Tubing	3.500	3-2C	3503502B0	7.20	3503502W0	9.15
	3.500	3-3C	3503503B0	9.15	3503503W0	11.05
	3.500	3-4C	3503504B0	10.80	3503504W0	13.05
3-1/2" Pipe	4.000	3-1/2-2C	3504002B0	7.75	3504002W0	10.00
	4.000	3-1/2-3C	3504003B0	10.00	3504003W0	11.95
	4.000	3-1/2-4C	3504004B0	13.05	3504004W0	15.80
3-3/4" Tubing	3.750	3-3/4-3C-OD	3503753B0	9.60	3503753W0	11.45
	3.750	3-3/4-4C-OD	3503754B0	11.45	3503754W0	14.10
4" Tubing	4.000	3-1/2-2C	3504002B0	7.75	3504002W0	10.00
	4.000	3-1/2-3C	3504003B0	10.00	3504003W0	11.95
	4.000	3-1/2-4C	3504004B0	13.05	3504004W0	15.80
4" Pipe	4.500	4-2C	3504502B0	8.45	3504502W0	10.80
	4.500	4-3C	3504503B0	10.80	3504503W0	13.40
	4.500	4-4C	3504504B0	14.10	3504504W0	17.20
4-1/4" Tubing	4.250	4-1/4-3C-OD	3504253B0	10.80	3504253W0	13.05
	4.250	4-1/4-4C-OD	3504254B0	12.25	3504254W0	16.30
4-1/2" Tubing	4.500	4-2C	3504502B0	8.45	3504502W0	11.05
	4.500	4-3C	3504503B0	10.80	3504503W0	14.10
	4.500	4-4C	3504504B0	14.10	3504504W0	20.35
4-1/2" Pipe	5.000	4-1/2-2C	3505002B0	9.15	3505002W0	10.80
4-1/2" Pipe	5.000	4-1/2-3C	3505003B0	11.25	3505003W0	13.40
	5.000	4-1/2-4C	3505004B0	15.25	3505004W0	17.20
4-3/4" Tubing	4.750	4-3/4-3C-OD	3504753B0	11.05	3504753W0	13.65
	4.750	4-3/4-4C-OD	3504754B0	15.00	3504754W0	17.80
5" Tubing	5.000	4-1/2-2C	3505002B0	9.15	3505002W0	10.80
	5.000	4-1/2-3C	3505003B0	11.25	3505003W0	13.40
	5.000	4-1/2-4C	3505004B0	15.25	3505004W0	17.20
5" Pipe	5.563	5-2C	3505562B0	10.50	3505562W0	11.45
	5.563	5-3C	3505563B0	12.25	3505563W0	16.60
	5.563	5-4C	3505564B0	17.20	3505564W0	21.65
5-1/4" Tubing	5.250	5-1/4-3C-OD	3505253B0	11.60	3505253W0	16.30
5-1/2" Tubing	5.500	5-1/2-3C-OD	3505503B0	11.95	3505503W0	17.20
	5.500	5-1/2-4C-OD	3505504B0	16.60	3505504W0	22.45
5-3/4" Tubing	5.750	5-3/4-3C-OD	3505753B0	13.05	3505753W0	16.75
	5.750	5-3/4-4C-OD	3505754B0	16.75	3505754W0	23.80
6" Tubing	6.000	6-2C-OD	3506002B0	10.80	3506002W0	12.25
	6.000	6-3C-OD	3506003B0	13.65	3506003W0	18.10
	6.000	6-4C-OD	3506004B0	17.80	3506004W0	23.80
	6.000	6-5C-OD	3506005B0	21.25	3506005W0	27.50
6" Pipe	6.625	6-2C	3506622B0	11.45	3506622W0	15.00
	6.625	6-3C	3506623B0	15.00	3506623W0	18.70
	6.625	6-4C	3506624B0	18.70	3506624W0	26.55
	6.625	6-5C	3506625B0	22.45	3506625W0	29.95
6-1/4" Tubing	6.250	6-1/4-3C-OD	3506253B0	14.10	3506253W0	18.70
	6.250	6-1/4-4C-OD	3506254B0	18.10	3506254W0	25.25
6-1/2" Tubing	6.500	6-1/2-3C-OD	3506503B0	15.00	3506503W0	20.05
	6.500	6-1/2-4C-OD	3506504B0	18.10	3506504W0	26.20
6-3/4" Tubing	6.750	6-3/4-3C-OD	3506753B0	15.00	3506753W0	20.90
	6.750	6-3/4-4C-OD	3506754B0	18.70	3506754W0	26.55
7" Tubing	7.000	7-3C-OD	3507003B0	15.25	3507003W0	21.35
7" Tubing	7.000	7-4C-OD	3507004B0	20.05	3507004W0	27.65
	7.000	7-5C-OD	3507005B0	23.80	3507005W0	31.70
7-1/4" Tubing	7.250	7-1/4-3C-OD	3507253B0	16.30	3507253W0	22.15
7-1/2" Tubing	7.500	7-1/2-3C-OD	3507503B0	16.60	3507503W0	23.20
	7.500	7-1/2-4C-OD	3507504B0	21.25	3507504W0	29.30
7-3/4" Tubing	7.750	7-3/4-3C-OD	3507753B0	16.75	3507753W0	23.80
8" Tubing	8.000	8-2C-OD	3508002B0	18.70	3508002W0	24.35
	8.000	8-3C-OD	3508003B0	23.80	3508003W0	31.70
	8.000	8-4C-OD	3508004B0	29.05	3508004W0	38.40
	8.000	8-5C-OD	3508005B0	33.05	3508005W0	43.40
8" Pipe	8.625	8-2C	3508622B0	20.05	3508622W0	27.50
	8.625	8-3C	3508623B0	25.25	3508623W0	33.90
	8.625	8-4C	3508624B0	29.95	3508624W0	40.05
	8.625	8-5C	3508625B0	35.35	3508625W0	49.45
9" Tubing	9.000	9-3C-OD	3509003B0	26.05	3509003W0	36.10
	9.000	9-4C-OD	3509004B0	31.15	3509004W0	40.80
10" Tubing	10.000	10-3C-OD	3510003B0	28.10	3510003W0	38.65
	10.000	10-4C-OD	3510004B0	31.25	3510004W0	42.60
	10.000	10-5C-OD	3510005B0	38.40	3510005W0	50.25
10" Pipe	10.750	10-3C	3510753B0	29.30	3510753W0	42.45
	10.750	10-4C	3510754B0	33.05	3510754W0	45.65
	10.750	10-5C	3510755B0	39.30	3510755W0	54.40
12" Tubing	12.000	12-3C-OD	3512003B0	33.90	3512003W0	46.05
	12.000	12-4C-OD	3512004B0	37.50	3512004W0	49.45
	12.000	12-5C-OD	3512005B0	42.60	3512005W0	56.75
12" Pipe	12.750	12-3C	3512753B0	35.55	3512753W0	49.45
	12.750	12-4C	3512754B0	39.15	3512754W0	53.60
	12.750	12-5C	3512755B0	45.05	3512755W0	60.95

* Neoprene

(1) Same price applies for couplings with red rubber gaskets.

- *Prices of other types of gasket material or for sizes not shown are available on request.*
- *All shipments F.O.B. Erie, PA.*
- *Prices subject to change without notice*


How To Order:

1. Specify: "REPLACEMENT GASKETS for Morris Compression Couplings."
2. Give coupling code number and O.D. of pipe or tube.
3. Give the length of original coupling (or number of bolts).
4. Specify material: Black or white neoprene, red rubber.
5. If you require grounding strips, specify aluminum or stainless steel.


Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.

Quickon II Couplers

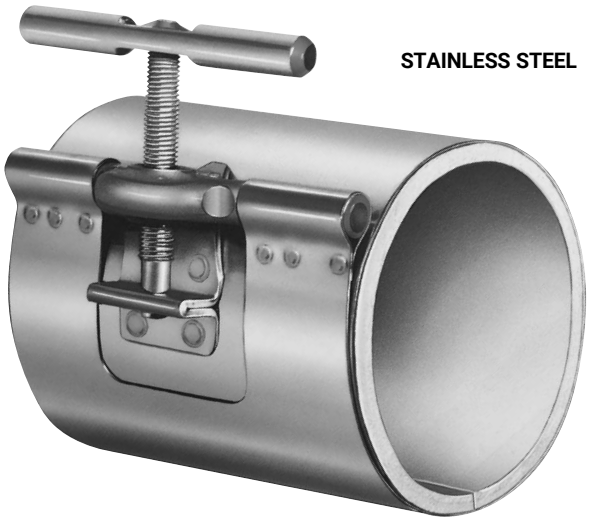

STAINLESS STEEL

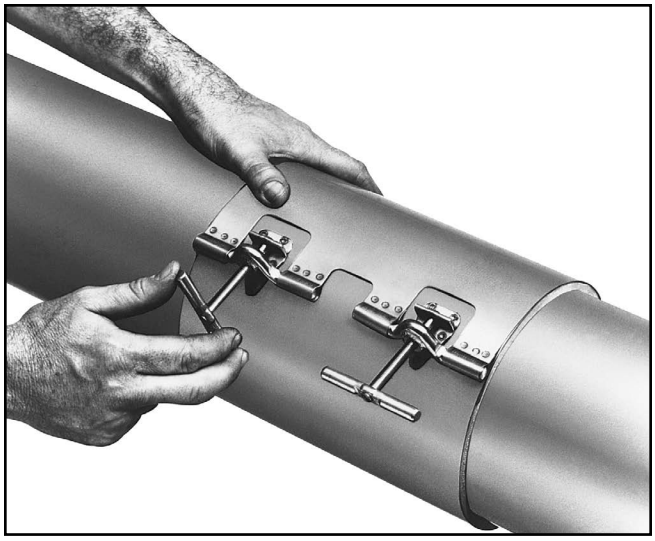

FOR PNEUMATIC OR VACUUM CONVEYING SYSTEMS

Morris Quickon II Couplers can be installed or removed with a twist of the wrist. No tools or special skills needed. The positive-locking system turns easily to seal or to compensate for normal O.D. pipe or tubing tolerances.

This in-line Coupler is ideal for use where fast takedown and reassembly of lines is essential; reduced coupler weight is desirable; a line or system is frequently modified or wraparound installation is necessary.

QUICKON II COUPLER

O.D. Tubing (in.)	Morris Coupling Code	Weight Each (lbs.)	LIST PRICE Food-Grade Gum Gasket	
			PIC No.	Price
1.500	1501	0.58	2401501G2	35.25
1.660	1661	0.6	2401661G2	36.10
1.750	1751	0.62	2401751G2	36.70
1.900	1901	0.65	2401901G2	37.45
2.000	2001	0.68	2402001G2FG	38.35
2.125	2121	0.7	2402121G2	39.15
2.250	2251	0.71	2402251G2	39.95
2.375	2371	0.74	2402371G2	41.35
2.500	2501	0.77	2402501G2FG	42.35
2.750	2751	0.8	2402751G2	44.50
2.875	2871	0.84	2402871G2	45.50
3.000	3001	0.88	2403001G2FG	46.85
3.250	3251	0.97	2403251G2	48.50
3.500	3501	1.06	2403501G2FG	51.25
3.750	3751	1.15	2403751G2	53.40
4.000	4001	1.25	2404001G2FG	55.80
4.250	4251	1.32	2404251G2	57.85
4.500	4501	1.4	2404501G2FG	58.85
5.000	5001	1.55	2405001G2FG	61.60
5.563	5561	1.63	2405561G2	66.25
6.000	6001	1.72	2406001G2FG	69.90
6.250	6251	1.78	2406251G2	72.80
6.625	6621	1.82	2406621G2	74.35
8.000	8001	2.25	2408001G2FG	94.10
8.625	8621	2.38	2408621G2	103.75
9.000	9001	2.45	2409001G2	115.40
10.000	10001	2.65	2410001G2	124.15

Standard QUICKON II couplers listed are 4" in length.

DUAL QUICKON II COUPLER

O.D. Tubing (in.)	Morris Coupling Code	LIST PRICE Food-Grade Gum Gasket	
		PIC No.	Price
4.000	2-4001	2804002G2	99.45
4.500	2-4501	2804502G2	107.70
5.000	2-5001	2805002G2	113.10
6.000	2-6001	2806002G2	122.90
6.625	2-6621	2806622G2	130.05
8.000	2-8001	2808002G2	147.85
8.625	2-8621	2808622G2	154.90
10.000	2-10001	2810002G2	173.40
10.750	2-10751	2810752G2	185.95
12.000	2-12001	2812002G2	195.85
12.750	2-12751	2812752G2	218.80

Dual QUICKON II Couplers Listed Are 9-1/2" In Length.

Specifications

All stainless-steel construction including band, strike plate, handle screw and yoke. Gasket is abrasion-resistant, gum rubber attached to band. Static-conducting grounding strip included on request.

Order by O.D. Size, Code No., and Gasket.

Request prices on special sizes not shown.


Prices subject to change without notice.

For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Morris Gripper™ Couplers

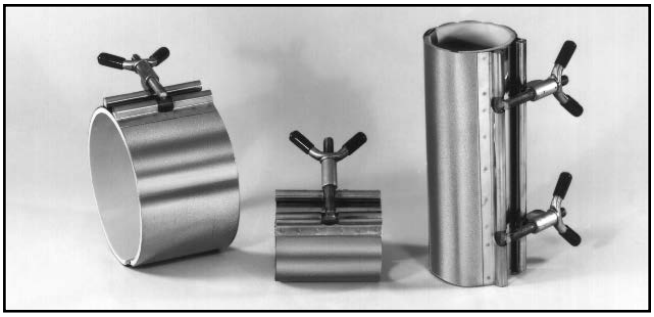

The GRIPPER was devised as a quick coupler for dry, bulk transport, tank tubing. This unique coupling just slides onto the tubing or wraps around it and is tightened by hand in seconds, but it provides better support than rubber hose and band clamps. The GRIPPER's positive-sealing gum gaskets allow for tube and pipe variations. And, because it's made of 100% stainless steel, it will not corrode due to harsh weather or road conditions. Silicone gaskets that comply with applicable FDA requirements are available upon request.

Single Wingnut Coupler

O.D. Tubing (in.)	Morris Coupling Code	Weight Each (lbs.)	LIST PRICE Food-Grade Gum Gasket	
			Gripper PIC No.	Gripper Price
1.500	1501	0.58	2401501G2MB	38.75
1.660	1661	0.6	2401661G2MB	39.75
1.750	1751	0.62	2401751G2MB	39.95
1.900	1901	0.65	2401901G2MB	41.35
2.000	2001	0.68	2402001G2FGMB	42.35
2.125	2121	0.7	2402121G2MB	43.15
2.250	2251	0.71	2402251G2MB	44.00
2.375	2371	0.74	2402371G2MB	45.60
2.500	2501	0.77	2402501G2FGMB	46.85
2.750	2751	0.8	2402751G2MB	49.20
2.875	2871	0.84	2402871G2MB	49.85
3.000	3001	0.88	2403001G2FGMB	51.60
3.250	3251	0.97	2403251G2MB	53.40
3.500	3501	1.06	2403501G2FGMB	56.20
3.750	3751	1.15	2403751G2MB	58.75
4.000	4001	1.25	2404001G2FGMB	61.15
4.250	4251	1.32	2404251G2MB	63.60
4.500	4501	1.4	2404501G2FGMB	65.00
5.000	5001	1.55	2405001G2FGMB	67.85
5.563	5561	1.63	2405561G2MB	73.00
6.000	6001	1.72	2406001G2FGMB	77.05
6.250	6251	1.78	2406251G2MB	80.10
6.625	6621	1.82	2406621G2MB	81.80
8.000	8001	2.25	2408001G2FGMB	103.75
8.625	8621	2.38	2408621G2MB	114.10
9.000	9001	2.45	2409001G2MB	127.15
10.000	10001	2.65	2410001G2MB	136.90



Double Wingnut Coupler


O.D. Tubing (in.)	Morris Coupling Code	LIST PRICE Food-Grade Gum Gasket	
		Gripper PIC No.	Gripper Price
4.000	2-4001	2804002G2MB	109.45
4.500	2-4501	2804502G2MB	118.50
5.000	2-5001	2805002G2MB	124.65
6.000	2-6001	2806002G2MB	135.50
6.625	2-6621	2806622G2MB	143.30
8.000	2-8001	2808002G2MB	162.60
8.625	2-8621	2808622G2MB	170.45
10.000	2-10001	2810002G2MB	190.80
10.750	2-10751	2810752G2MB	204.60
12.000	2-12001	2812002G2MB	214.20
12.750	2-12751	2812752G2MB	240.90



Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.


All Ⓐ Round Stainless-Steel Couplings/Repair Clamps

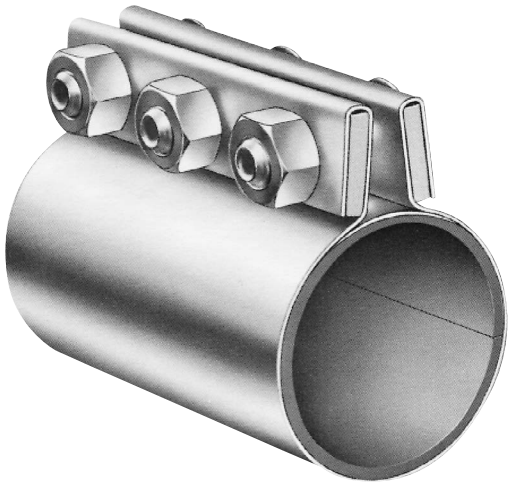

- ***To Join System Piping***
- ***To Repair Piping***

This spanner-type combination coupling and repair clamp offers many advantages. It is quickly and easily installed by slipping on, or wrapping around, the pipe. This is because the spanner and gasket are permanently attached to the band, creating, in effect, a one-piece coupling/clamp. The thick, resilient, Neoprene gasket assures a positive butt-joint seal. It accommodates surface variations such as encountered in cast iron and fiberglass piping. The spanner design eliminates the need for a separate inner sleeve. The stainless steel All Ⓐ Round Coupling/Repair Clamp offers a lightweight and economical unit which is strong and durable.

Nom. Pipe (IPS) Size	Morris Coupling Code	Coupling Length	No. of Bolts	Size of Bolts (inches)	Gasket Thickness	LIST PRICE With Carbon Steel Zinc Plated Bolts PIC No.	LIST PRICE With Carbon Steel Zinc Plated Bolts Price	LIST PRICE With #304 Stainless Bolt Price
2"	2 x 6-IP	6"	3	1/2 x 1-3/4	1/8"	8102373B0	73.75	PRICE AVAILABLE UPON REQUEST
	2 x 8-IP	8"	4	1/2 x 1-3/4	1/8"	8102374B0	86.15	
	2 x 10-IP	10"	5	1/2 x 1-3/4	1/8"	8102375B0	100.10	
	2 x 12-IP	12"	6	1/2 x 1-3/4	1/8"	8102376B0	116.25	
3"	3 x 6-IP	6"	3	5/8 x 2	3/16"	8103503B0	91.15	
	3 x 8-IP	8"	4	5/8 x 2	3/16"	8103504B0	105.15	
	3 x 10-IP	10"	5	5/8 x 2	3/16"	8103505B0	121.95	
	3 x 12-IP	12"	6	5/8 x 2	3/16"	8103506B0	137.60	
4"	4 x 6-IP	6"	3	5/8 x 2	3/16"	8104503B0FG	102.40	
	4 x 8-IP	8"	4	5/8 x 2	3/16"	8104504B0FG	117.20	
	4 x 10-IP	10"	5	5/8 x 2	3/16"	8104505B0	148.00	
	4 x 12-IP	12"	6	5/8 x 2	3/16"	8104506B0	178.15	
6"	6 x 6-IP	6"	3	5/8 x 2	1/4"	8106623B0FG	131.95	
	6 x 8-IP	8"	4	5/8 x 2	1/4"	8106624B0FG	147.65	
	6 x 10-IP	10"	5	5/8 x 2	1/4"	8106625B0	184.95	
	6 x 12-IP	12"	6	5/8 x 2	1/4"	8106626B0	221.65	
8"	8 x 6-IP	6"	2	3/4 x 3	1/4"	8108622B0	198.50	
	8 x 8-IP	8"	3	3/4 x 3	1/4"	8108623B0FG	214.60	
	8 x 10-IP	10"	4	3/4 x 3	1/4"	8108624B0	252.45	
	8 x 12-IP	12"	5	3/4 x 3	1/4"	8108625B0	293.00	
	8 x 16-IP	16"	6	3/4 x 3	1/4"	8108626B0	409.35	
10"	10 x 8-IP	8"	3	3/4 x 3	1/4"	8110753B0	238.00	
	10 x 10-IP	10"	4	3/4 x 3	1/4"	8110754B0	283.90	
	10 x 12-IP	12"	5	3/4 x 3	1/4"	8110755B0	325.10	
	10 x 16-IP	16"	6	3/4 x 3	1/4"	8110756B0	460.35	
12"	12 x 8-IP	8"	3	3/4 x 3	1/4"	8112753B0	263.65	
	12 x 10-IP	10"	4	3/4 x 3	1/4"	8112754B0	302.00	
	12 x 12-IP	12"	5	3/4 x 3	1/4"	8112755B0	360.10	
	12 x 16-IP	16"	6	3/4 x 3	1/4"	8112756B0	512.35	

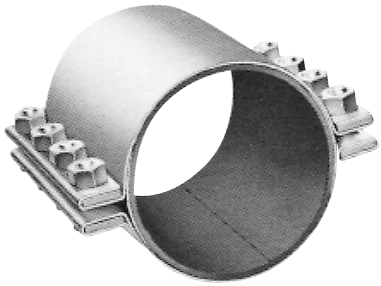

For nominal pipe sizes over 12", request prices and specifications for Morris Double-Spanner Combination Couplings/Repair Clamps.

Specifications:

Band and spanner 304 stainless steel.
Butt joint Neoprene gasket.
Bar washers zinc-plated steel.
Carriage-type bolts and heavy hex nuts are zinc-plated carbon steel or 304 stainless steel.
For other materials to meet special needs, consult factory.

To Order:

Order by pipe size and Morris Code Number PLUS outside diameter and kind of pipe or duct. THIS IS IMPORTANT TO YOU. Failure to do this will result in delay in shipping your order until we have this information.

All shipments F.O.B. Erie, PA.


Prices subject to change without notice.


For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Single-Type Repair Clamp

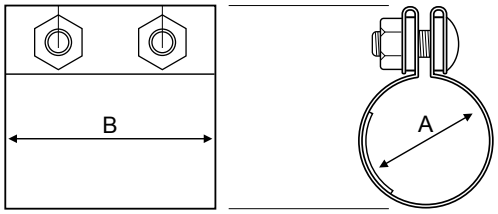

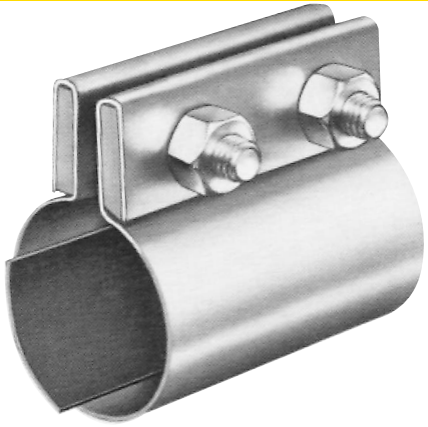

The Morris Single-Type Repair Clamp is suitable for the quick repair of minor leaks in all types of pipe. It consists of an outer shell of zinc-plated steel, together with a single-strip neoprene gasket. When other than steel clamps and neoprene gaskets are required, specifications should be stated on special order. Prices on other than stock sizes are available on request.

Nom. Pipe (IPS) Size	O.D. Pipe (A)	Morris Coupling Code	Clamp Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE (2) BLACK Gasket* PIC No.	Price (1)
1/2"	0.840	1/2-2S	2"	2	5/16 x 1-1/4	0.41	2000842B0	33.25
3/4"	1.050	3/4-2S	2"	2	5/16 x 1-1/4	0.45	2001051B0	33.70
1"	1.315	1-1S	2"	1	1/2 x 1-3/4	0.62	2001311B0	9.60
	1.315	1-2S	4"	2	1/2 x 1-3/4	1.2	2001312B0	12.80
1-1/4"	1.660	1-1/4-1S	2"	1	1/2 x 1-3/4	0.75	2001661B0	11.05
	1.660	1-1/4-2S	4"	2	1/2 x 1-3/4	1.5	2001662B0	13.20
1-1/2"	1.900	1-1/2-1S	2"	1	1/2 x 1-3/4	0.83	2001901B0	11.35
	1.900	1-1/2-2S	4"	2	1/2 x 1-3/4	1.6	2001902B0	13.65
2"	2.375	2-1S	2"	1	1/2 x 1-3/4	1.3	2002371B0	11.95
	2.375	2-2S	4"	2	1/2 x 1-3/4	2.2	2002372B0	14.45
	2.375	2-3S	6"	3	1/2 x 1-3/4	3	2002373B0	18.55
	2.375	2-4S	8"	4	1/2 x 1-3/4	4.1	2002374B0	21.95
2-1/2"	2.875	2-1/2-1S	2"	1	1/2 x 1-3/4	1.5	2002871B0	12.30
	2.875	2-1/2-2S	4"	2	1/2 x 1-3/4	2.3	2002872B0	15.95
	2.875	2-1/2-3S	6"	3	1/2 x 1-3/4	3.2	2002873B0	20.45
	2.875	2-1/2-4S	8"	4	1/2 x 1-3/4	4.4	2002874B0	11.05
3"	3.500	3-1S	2"	1	5/8 x 2	1.6	2003501B0	12.70
	3.500	3-2S	4"	2	5/8 x 2	2.5	2003502B0	17.85
	3.500	3-3S	6"	3	5/8 x 2	3.3	2003503B0	22.80
	3.500	3-4S	8"	4	5/8 x 2	4.6	2003504B0	26.45
3-1/2"	4.000	3-1/2-2S	4"	2	5/8 x 2	2.7	2004002B0	18.55
	4.000	3-1/2-3S	6"	3	5/8 x 2	3.5	2004003B0	24.25
	4.000	3-1/2-4S	8"	4	5/8 x 2	4.8	2004004B0	27.60
4"	4.500	4-2S	4"	2	5/8 x 2	2.9	2004502B0	20.60
	4.500	4-3S	6"	3	5/8 x 2	3.9	2004503B0	26.20
	4.500	4-4S	8"	4	5/8 x 2	5.1	2004504B0	31.95
5"	5.563	5-2S	4"	2	5/8 x 2	3.1	2005562B0	23.85
	5.563	5-3S	6"	3	5/8 x 2	4.2	2005563B0	28.85
	5.563	5-4S	8"	4	5/8 x 2	5.5	2005564B0	34.90
6"	6.625	6-2S	4"	2	5/8 x 2	3.4	2006622B0	27.60
	6.625	6-3S	6"	3	5/8 x 2	4.9	2006623B0	33.70
	6.625	6-4S	8"	4	5/8 x 2	6.4	2006624B0	40.75
8"	8.625	8-2S	6"	2	3/4 x 3	6.7	2008622B0	58.35
	8.625	8-3S	8"	3	3/4 x 3	9.6	2008623B0	75.60
	8.625	8-4S	10"	4	3/4 x 3	11.2	2008624B0	92.95
	8.625	8-5S	12"	5	3/4 x 3	13.6	2008625B0	110.60
10"	10.750	10-2S	6"	2	3/4 x 3	7.2	2010752B0	67.75
	10.750	10-3S	8"	3	3/4 x 3	10.7	2010753B0	85.05
	10.750	10-4S	10"	4	3/4 x 3	14.1	2010754B0	102.40
	10.750	10-5S	12"	5	3/4 x 3	17.9	2010755B0	120.55
12"	12.750	12-2S	6"	2	3/4 x 3	8.1	2012752B0	77.10
	12.750	12-3S	8"	3	3/4 x 3	11.6	2012753B0	94.30
	12.750	12-4S	10"	4	3/4 x 3	15	2012754B0	111.35
	12.750	12-5S	12"	5	3/4 x 3	18.8	2012755B0	129.75
14"	14.000	14-2S	6"	2	3/4 x 3	9	2014002B0	86.70
	14.000	14-3S	8"	3	3/4 x 3	12.5	2014003B0	103.10
	14.000	14-4S	10"	4	3/4 x 3	15.9	2014004B0	121.20
	14.000	14-5S	12"	5	3/4 x 3	19.7	2014005B0	138.60


All shipments F.O.B. Erie, PA


**Neoprene*

Prices subject to change without notice.

©2026 Morris Coupling Company

Double-Type Repair Clamp

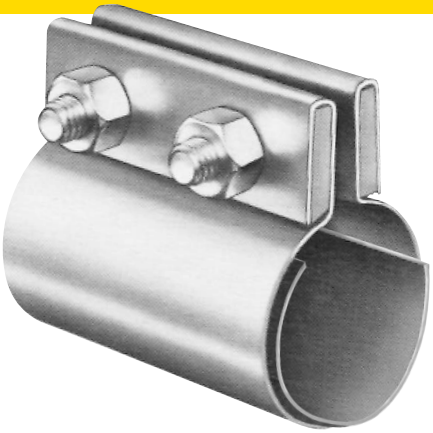

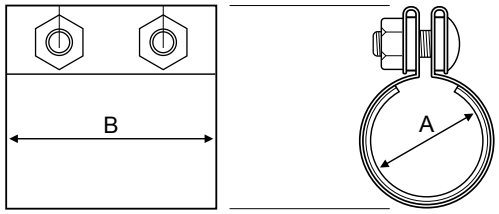

The Morris Double-Type Repair Clamp is suitable for use on all classifications of piping repair work. It contains an inner sleeve as well as a gasket that covers two-thirds of the circumference of the pipe; may be used individually or in series.

Shell and sleeve are of heavy, zinc-plated steel – gasket is black neoprene. Other materials available on special order. Request prices on sizes not listed.

Nom. Pipe (IPS) Size	O.D. Pipe (A)	Morris Coupling Code	Clamp Length (B)	No. of Bolts	Size of Bolts (inches)	Weight Each (lbs.)	LIST PRICE (2) BLACK Gasket* PIC No.	LIST PRICE (2) BLACK Gasket* Price (1)
1/2"	0.840	1/2-2D	2"	2	5/16 x 1-1/4	0.5	2100842B0	42.55
3/4"	1.050	3/4-2D	2"	2	5/16 x 1-1/4	0.54	2101052B0	42.70
1"	1.315	1-2D	4"	2	1/2 x 1-3/4	1.6	2101312B0	17.85
1-1/4"	1.600	1-1/4-2D	4"	2	1/2 x 1-3/4	1.7	2101602B0	18.35
1-1/2"	1.900	1-1/2-2D	4"	2	1/2 x 1-3/4	1.8	2101902B0	18.55
2"	2.375	2-2D	4"	2	1/2 x 1-3/4	2.3	2102372B0	20.25
	2.375	2-3D	6"	3	1/2 x 1-3/4	3.3	2102373B0	25.20
	2.375	2-4D	8"	4	1/2 x 1-3/4	4.6	2102374B0	30.80
2-1/2"	2.875	2-1/2-2D	4"	2	1/2 x 1-3/4	3.6	2102872B0	21.95
	2.875	2-1/2-3D	6"	3	1/2 x 1-3/4	3.8	2102873B0	27.60
	2.875	2-1/2-4D	8"	4	1/2 x 1-3/4	5.0	2102874B0	33.25
3"	3.500	3-2D	4"	2	5/8 x 2	2.9	2103502B0	23.85
	3.500	3-3D	6"	3	5/8 x 2	4.2	2103503B0	30.30
	3.500	3-4D	8"	4	5/8 x 2	5.6	2103504B0	36.70
3-1/2"	4.000	3-1/2-2D	4"	2	5/8 x 2	3.2	2104002B0	26.20
	4.000	3-1/2-3D	6"	3	5/8 x 2	4.5	2104003B0	31.95
	4.000	3-1/2-4D	8"	4	5/8 x 2	5.9	2104004B0	38.85
4"	4.500	4-2D	4"	2	5/8 x 2	3.5	2104502B0	27.45
	4.500	4-3D	6"	3	5/8 x 2	4.8	2104503B0	34.65
	4.500	4-4D	8"	4	5/8 x 2	6.1	2104504B0	41.95
4-1/2"	5.000	4-1/2-2D	4"	2	5/8 x 2	3.8	2105002B0	28.20
	5.000	4-1/2-3D	6"	3	5/8 x 2	5.1	2105003B0	36.70
	5.000	4-1/2-4D	8"	4	5/8 x 2	6.3	2105004B0	43.70
5"	5.563	5-2D	4"	2	5/8 x 2	4.1	2105562B0	31.05
	5.563	5-3D	6"	3	5/8 x 2	5.4	2105563B0	38.60
	5.563	5-4D	8"	4	5/8 x 2	6.5	2105564B0	45.55
6"	6.625	6-2D	4"	2	5/8 x 2	4.7	2106622B0	36.45
	6.625	6-3D	6"	3	5/8 x 2	6.0	2106623B0	46.20
	6.625	6-4D	8"	4	5/8 x 2	7.1	2106624B0	54.80
	6.625	6-5D	10"	5	5/8 x 2	8.3	2106625B0	64.75
8"	8.625	8-2D	6"	2	3/4 x 3	8.8	2108622B0	62.90
	8.625	8-3D	8"	3	3/4 x 3	12.8	2108623B0	84.55
	8.625	8-4D	10"	4	3/4 x 3	16.4	2108624B0	101.85
	8.625	8-5D	12"	5	3/4 x 3	19.9	2108625B0	119.20
10"	10.750	10-2D	6"	2	3/4 x 3	10.8	2110752B0	69.90
	10.750	10-3D	8"	3	3/4 x 3	14.7	2110753B0	91.75
	10.750	10-4D	10"	4	3/4 x 3	18.4	2110754B0	110.35
	10.750	10-5D	12"	5	3/4 x 3	22.2	2110755B0	125.50
12"	12.750	12-2D	6"	2	3/4 x 3	13.1	2112752B0	79.55
	12.750	12-3D	8"	3	3/4 x 3	17.7	2112753B0	102.40
	12.750	12-4D	10"	4	3/4 x 3	22.3	2112754B0	113.10
	12.750	12-5D	12"	5	3/4 x 3	26.8	2112755B0	135.90
14"	14.000	14-3D	8"	3	3/4 x 3	18.8	2114003B0	111.35
	14.000	14-4D	10"	4	3/4 x 3	23.6	2114004B0	121.80
	14.000	14-5D	12"	5	3/4 x 3	28.5	2114005B0	144.90

All shipments F.O.B. Erie, PA

**Neoprene*

For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com


Morris PVC Flexible Hose

Four distinct types to meet varying application needs.

Morris offers material-handling hoses to meet the wide variety of bulk conveying system requirements which may be encountered. Flexible hose is suitable for both vacuum and pressure-discharge service.

Morris hoses are ideal for conveying pellets, granular material and powdery substances. Flexible hose offers a fast, convenient method of finishing a pneumatic conveying system.

Morris also offers clamps to help complete your installation.

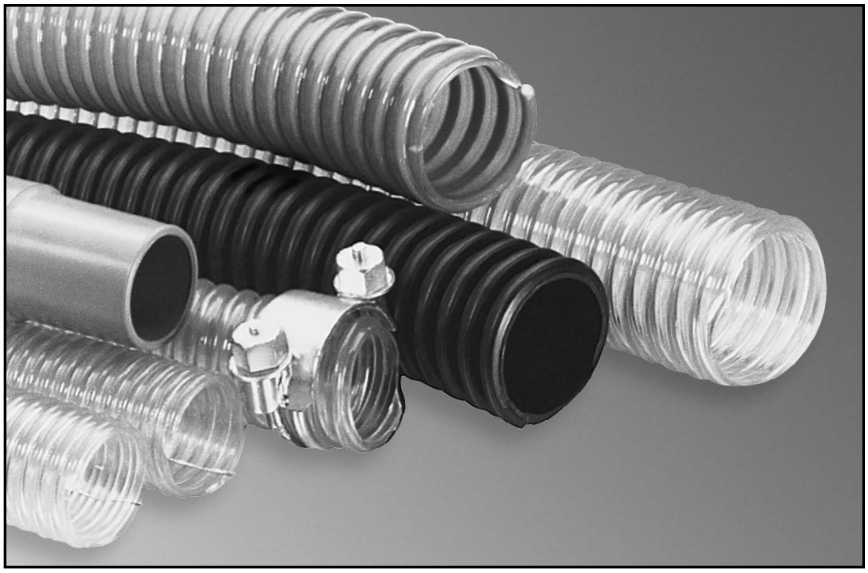

MORR-CLEAR™

Economical Food-Grade PVC Transfer Hose

Our most popular material-handling hose features a clear PVC tube with a smooth bore to provide excellent material flow rates. A clear, rigid, external PVC helix reinforcement enables user to visually monitor flow of material.

High-density PVC materials are known for their ability to withstand abrasion. Hose construction provides good flexibility with light weight. Hose carries FDA “3A Dairy” rating. Operating temperature range from 10°F to 150°F.

MORR-CLEAR Number	I.D. (inch)	O.D. (inch)	Working Pressure (psi)	Vacuum Rating (inch HG)	Bend Radius (inch)	Weight (lbs./ft.)	Standard Coils (ft.)
MC150	1.5	1.81	50	29	3.2	0.31	50
MC45M	45 mm	2.05	40	29	3.2	0.42	50
MC200	2	2.43	40	29	3.2	0.42	50
MC250	2.5	3.00	35	29	4.5	0.65	50
MC300	3	3.58	35	29	6.5	0.85	50
MC400	4	4.68	35	15	10.4	1.30	50
MC500	5	5.65	30	10	21.0	1.50	50
MC600	6	6.72	30	10	29.4	2.20	25

MORR-CLEAR™ STATIC

Food-Grade PVC Hose with Static-Dissipating Ground Wire

This is the same durable lightweight hose described above. The only difference is MORR-CLEAR STATIC contains an integral wire to assure a positive ground where static build-up is a concern.

MORR-CLEAR Number	I.D. (inch)	O.D. (inch)	Working Pressure (psi)	Vacuum Rating (inch HG)	Bend Radius (inch)	Weight (lbs./ft.)	Standard Coils (ft.)
MS150	1.5	1.81	50	29	3.2	0.31	50
MS45M	45mm	2.05	40	29	3.2	0.42	50
MS200	2	2.43	40	29	3.2	0.42	50
MS250	2.5	3.00	35	29	4.5	0.65	50
MS300	3	3.58	35	29	6.5	0.85	50
MS400	4	4.68	35	15	10.4	1.30	50
MS500	5	5.65	30	10	21.0	1.50	50
MS600	6	6.72	30	10	29.4	2.20	25

Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.

Morris PVC Flexible Hose continued

MORR-THANE™
Extended Performance High-Density Polyurethane Transfer Hose

Hose is made from a high-density poly-urethane formulation for extended life when handling abrasive materials. Hose has a smooth bore to provide excellent material flow rates. Corrugated construction provides good flexibility and light weight making hose easy to use. Hose remains flexible at sub-zero temperatures from -30°F to 150°F.

MORR-THANE Number	I.D. (inch)	O.D. (inch)	Working Pressure (psi)	Vacuum Rating (inch HG)	Bend Radius (inch)	Weight (lbs./ft.)	Standard Coils (ft.)
MT150	1.5	1.86	75	29	3.9	0.42	100
MT200	2	2.42	65	29	5.5	0.68	100
MT250	2.5	3.04	50	29	7.0	1.08	100
MT300	3	3.64	50	29	8.0	1.35	100
MT400	4	4.77	50	29	14.0	2.33	100
MT500	5	5.75	45	29	20.0	2.95	50
MT600	6	7.00	35	25	25.0	3.44	50
MT800	8	9.20	25	25	48.0	6.48	20

Standard MORR-THANE is blue. Upon request, it is available clear with static wire. Contact Erie for pricing.

MORR-TUFF™
Material Hose For Severe Service

MORR-TUFF is specifically designed for unloading pellets from rail cars, handling sand blast grit, and the transfer of grain and other severe applications.

MORR-TUFF is a blend of Nitrile, poly-urethane and PVC that makes it flexible, lightweight and easy to handle – even in the large sizes. Compared to rubber and metal hoses, MORR-TUFF offers a low-cost alternative. The outer black cover is static dissipating and ozone resistant. Operating temperature from -30°F to 150°F.

MORR-THANE Number	I.D. (inch)	O.D. (inch)	Working Pressure (psi)	Vacuum Rating (inch HG)	Bend Radius (inch)	Weight (lbs./ft.)	Standard Coils (ft.)
MF150	1.5	1.94	45	29	3.2	0.42	100
MF200	2	2.50	45	29	5.5	0.65	100
MF300	3	3.77	40	29	7.5	1.31	100
MF400	4	4.85	40	29	11.0	1.70	100
MF500	5	5.95	40	29	15.0	2.60	100
MF600	6	7.08	40	29	20.0	3.21	50
MF800	8	9.28	30	29	30.0	6.10	20

Morris Hose Accessories
MORR-TITE™ Hose Clamps



Hose Clamps Galvanized steel saddle, nuts and washers with electroplated, spiral-thread bolts.

Spiral Double Bolt Clamps

Hose I.D.	Clockwise Part Number	Counterclockwise Part Number
1-1/2”	SDBC-0150R	SDBC-0150L
2”	SDBC-0200R	SDBC-0200L
2-1/2”	SDBC-0250R	SDBC-0250L
3”	SDBC-0300R	SDBC-0300L
4”	SDBC-0400R	SDBC-0400L
5”	SDBC-0500R	SDBC-0500L
6”	SDBC-0600R	SDBC-0600L
8”	SDBC-0800R	SDBC-0800L
10”	SDBC-1000R	SDBC-1000L

Features/Benefits

- Higher Grip Capacity
- Increase Holding Capacity
- Accommodates Both Clockwise and Counterclockwise Helix
- Smaller Size Design Envelope
- Optional Stainless-Steel Construction


Morris Metal Flexible Hose



General Purpose Metal Flex Hose

This unlined general purpose hose features interlocked construction formed from a single metal strip. The balanced interlocking manufacturing process provides for maximum flexibility and longest service life. Pressure and vacuum capabilities may be easily enhanced by the selection of an appropriate packing material.

The unlined metal flex-hose is available in various alloys, metal strip thicknesses and in diameters from 1-1/2" through 8" I.D. Interlocked hose is available in any length and can be provided in bulk or fabricated assemblies.

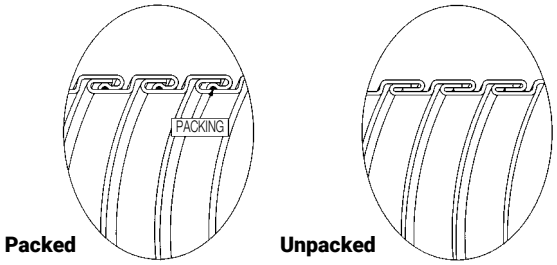

I.D. (in.)	Strip Thickness 10 Material Code G, S		15 Material Code G, S		18 Material Code G, S, 6		25 Material Code G, S		30 Material Code G		20 Material Code A	
	Weight Per ft. (lbs.)	Min. Bend Radius (in.)	Weight Per ft. (lbs.)	Min. Bend Radius (in.)	Weight Per ft. (lbs.)	Min. Bend Radius (in.)	Weight Per ft. (lbs.)	Min. Bend Radius (in.)	Weight Per ft. (lbs.)	Min. Bend Radius (in.)	Weight Per ft. (lbs.)	Min. Bend Radius (in.)
1-1/2	0.5	6	0.7	6	0.9	6	1.3	7				
2	0.7	8	1.0	8	1.1	8	1.7	9	2.0	11		
2-1/2	0.8	10	1.2	10	1.4	10	2.1	11	2.5	13		
3	1.0	11	1.4	12	1.6	12	2.5	13	2.9	14	0.7	14
3-1/2	1.1	13	1.6	14	1.9	14	2.8	15	3.4	16	0.8	16
4	1.2	14	1.8	16	2.2	16	3.2	17	3.8	18	0.9	18
4-1/2	1.4	17	2.0	17	2.4	17	3.6	19	4.3	20	1.0	20
5	1.5	18	2.2	19	2.7	19	4.0	21	4.7	22	1.1	22
6	1.8	21	2.7	23	3.2	23	4.7	25	5.6	26	1.3	26
7			3.1	27	3.7	27	5.5	29	6.5	30	1.5	30
8			3.5	30	4.2	30	6.2	33	7.4	34	1.8	34

NOTE: Other diameters are available on request.
NOTE: For packed hose, add 10% to both Weight Per Foot and Minimum Bend Radius.

Morris Material Codes

Materials

A – Aluminum (unpacked only)
G – Galvanized Steel
S – T304 Stainless Steel
6 – T316 Stainless Steel


Technical data is meant to be used as a guide. If more specific information is required, please contact the factory.

Packings Available For Increased Pressure and Vacuum Capabilities		
Packing Type	Features	Max. Temp.
Cotton	Most Economical Packing	180°F
Elastomeric	Provides Maximum Pressure and Vacuum Capability	200°F
Copper	For High Temperatures	800°F
High Temp. Fiber	Specially Coated High Temperature Filament	1,000°F
Stainless Steel	For Extreme Temperatures	1,200°F

Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.

Morris Metal Flexible Hose *continued*

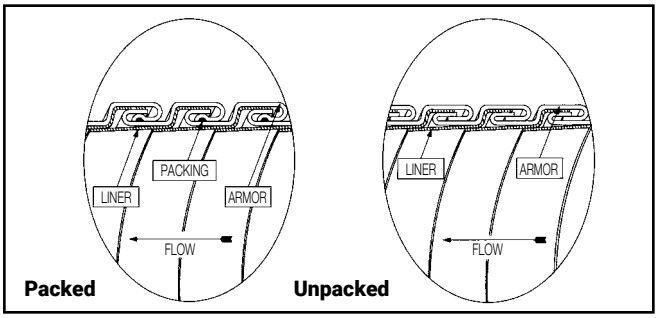

I.D. (in.)	Strip Thickness 10 Material Code G, S / C, S, 4 Weight Per ft. (lbs.)	10 Min. Bend Radius (in.)	15 Material Code G, S , 6 / C, S, 4 Weight Per ft. (lbs.)	15 Min. Bend Radius (in.)	18 Material Code G, S / C, S Weight Per ft. (lbs.)	18 Min. Bend Radius (in.)	25 Material Code A / S Weight Per ft. (lbs.)	25 Min. Bend Radius (in.)
1-1/2	1.2	7	1.3	8				
2	1.6	9	1.7	10				
2-1/2	1.9	11	2.2	12				
3	2.3	13	2.6	14	3.2	18		
3-1/2	2.6	15	3.0	16	3.7	21		
4	3.0	17	3.4	18	4.2	23	2.1	23
4-1/2	3.4	19	3.8	21	4.7	26	2.3	26
5	3.7	21	4.2	23	5.2	29	2.6	29
6	4.5	25	5.0	27	6.2	34	3.1	34
7	5.2	29	5.8	32	7.2	40	3.6	40
8	5.9	33	6.6	36	8.2	45	4.1	45

NOTE: Other diameters are available on request.
NOTE: For packed hose, add 10% to both Weight Per Foot and Minimum Bend Radius.

Metal Smooth-Bore Flex Hose

This smooth-bore hose is ideally suited for dry-bulk pneumatic conveying. This hose is produced with a durable outer armor and a highly abrasion-resistant liner. A precision manufacturing process makes this hose unequaled in strength and flexibility. Pressure and vacuum capabilities may be easily enhanced by the selection of an appropriate packing material.

The smooth-bore hose is available in various alloys, metal strip thicknesses, and in diameters from 1-1/2" through 8" I.D. Smooth bore hose is available in any length and can be provided in bulk or fabricated assemblies.

Packings Available For Increased Pressure and Vacuum Capabilities		
Packing Type	Features	Max. Temp.
Cotton	Most Economical Packing	180°F
Elastomeric	Provides Maximum Pressure and Vacuum Capability	200°F
Copper	For High Temperatures	800°F
High Temp. Fiber	Specially Coated High Temperature Filament	1,000°F
Stainless Steel	For Extreme Temperatures	1,200°F

Morris Material Codes

Armor Materials:
A – Aluminum (unpacked only)
G – Galvanized Steel
S – T304 Stainless Steel
6 – T316 Stainless Steel

Liner Materials:
S – T301 Stainless Steel
4 – T410 Stainless Steel
C – Carbon Steel

Technical data is meant to be used as a guide. If more specific information is required, please contact the factory.



Morris Custom-Fabricated Interlocked Hose Assemblies

State-of-the-art fabricating methods, combined with an extensive selection of Morris Ever-Tite® couplings, enable Morris to effectively supply any configuration of hose assemblies.

Typical end fittings include cam and groove connectors, pipe and tube nipples, flanges and hose shank adapters.

Maximum Steel and Fabrication Temperatures			
Steel Type	Maximum Temp.	Fabrication Technique	Max. Temp.
Stainless Steel	1,750°F	Welding	1,200°F
Carbon Steel	850°F	Brazing	700°F
Galvanized Steel	450°F	Epoxy	250°F



Note: Epoxy may be used with all metal types. However, applications are limited to 250°F service.





For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Installation Components




	Description	Part Number	Quantity	List Price Per Length
1-5/8" Channel 	• Slotted channel. • 9/16" x 1-1/8" slots on 2" center. • 12-gauge roll-formed strip • Available in 10' and 20' lengths. • Standard finish galvanized.	**61G158CHNL-10** 10' length **61G158CHNL-20** 20' length	1 1	$56.00 $112.00
Threaded Rod 	• Electro galvanized. • Available in 3/8" and 1/2" diameter. • 6' and 12' lengths.	**61G38ROD06** 3/8" rod; 6' length **61G38ROD12** 3/8" rod; 12' length **61G12ROD06** 1/2" rod; 6' length **61G12ROD12** 1/2" rod; 12' length	1 1 1 1	$6.40 $12.80 $13.08 $21.80

	Description	Part Number	Quantity Per Box	List Price Per Box
Rod Couplers 	• Couplers to accommodate 3/8" and 1/2" rod.	**61G38CPL** 3/8" coupler **61G12CPL** 1/2" coupler	100 100	$130.00 $224.00
Spring Nut 	• 3/8" – 16 and 1/2" – 13 spring nuts	**61G38SPNUT** 3/8" – 16 spring nut **61G12SPNUT** 1/2" – 13 spring nut	100 100	$127.27 $132.73
Hex Nut 	• 3/8" – 16 and 1/2" – 13 nuts	**61G38HXNUT** 3/8" – 16 nut **61G12HXNUT** 1/2" – 13 nut	100 100	$8.33 $25.00
Flat Washer 	• 3/8" and 1/2" flat washers	**61G38FLWASH** 3/8" flat washer **61G12FLWASH** 1/2" flat washer	100 100	$8.33 $25.00
Lock Washer 	• 3/8" and 1/2" lock washers	**61G38LKWASH** 3/8" lock washer **61G12LKWASH** 1/2" lock washer	100 100	$8.33 $21.67

Prices subject to change without notice.

©2026 Morris Coupling Company

Installation Components continued

	Description	Part Number	Quantity Per Box	List Price Per Box
Pipe Clamp 	• Galvanized. • Slotted hex-head screw and nut included.	**61G23CLMP** 2" pipe **61G27CLMP** 2-1/2" pipe **61G35CLMP** 3" pipe **61G40CLMP** 3-1/2" pipe **61G45CLMP** 4" pipe **61G558CLMP** 5" pipe **61G658CLMP** 6" pipe **61G858CLMP** 8" pipe	50 50 50 25 25 25 25 25	$156.25 $168.75 $196.25 $140.00 $148.25 $213.25 $284.50 $327.00
Tube Clamp 	• Galvanized. • Slotted hex-head screw and nut included.	**61G15CLMP** 1-1/2" tube **61G20CLMP** 2" tube **61G21CLMP** 2-1/8" tube **61G22CLMP** 2-1/4" tube **61G25CLMP** 2-1/2" tube **61G30CLMP** 3" tube **61G35CLMP** 3-1/2" tube **61G40CLMP** 4" tube **61G45CLMP** 4-1/2" tube **61G50CLMP** 5" tube **61G60CLMP** 6" tube **61G80CLMP** 8" tube	100 50 50 50 50 50 50 25 25 25 25 25	$240.00 $150.00 $123.00 $166.25 $162.50 $135.00 $196.25 $140.00 $148.25 $162.00 $225.00 $353.25
Beam Clamp 	• With set screw for 3/8" and 1/2" rod. • Standard finish galvanized.	**61G20BMCLP** 3/8" beam clamp **61G25BMCLP** 1/2" beam clamp	10 10	$72.00 $103.27

NOTES:

(1) All prices for channel and threaded rod are list per piece as indicated. Standard finish galvanized.

(2) Clamps, coupler and hardware items are sold in box quantity only. Box quantities are indicated for each item. Standard finish electro galvanized.

(3) Installation components are non-returnable.


(4) Prices F.O.B. Knoxville, TN.

Pipe and Tube Bends for pneumatic systems, short and long radius


Tube Bending Capabilities

Pipe and tube bends of up to 180° are readily available in aluminum, stainless, carbon steel and galvanized in the sizes listed. Other centerline radii are available but not shown. Special shapes, 'U' bends, offsets, and bifurcated bends available upon request.

Morris tube bends are manufactured in our Knoxville, Tennessee, Plant.

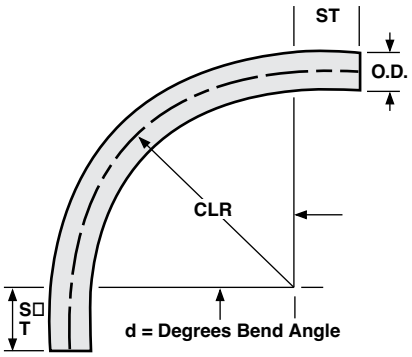

Morris Pipe and Tubing Straights



Straight lengths of pipe and tubing are available in carbon steel, aluminum, and stainless – 1-1⁄2" O.D. thru 10" pipe in a variety of wall thicknesses.

ORDER BENDS by O.D., wall thickness, alloy, degree of bend, centerline radius and tangent.


WALL THICKNESS: 16 ga. (.063), 14 ga. (.083), and 11 ga. (.120) in tubing. Schedules 5, 10 and 40 pipe. Other wall thicknesses on request.
*Carbon Steel, Schedule 40 Only.

MATERIALS: Aluminum is 6063-T1 extruded. Stainless is T304 ASTM A312 for Pipe and T304 ASTM A249 for tubing. Carbon steel ASTM A53 for pipe; A513 for tubing. Galvanized A53 for galvanized coated. Pipe and A513 for galvanized-coated tubing.

Tube Size (in)	Pipe Size (in)	Outside Diameter in.	Outside Diameter mm	Common Centerline Radii (clr) (in)	Std. Tangent (st)
1"		1.0	25.4	3, 6, 12	4"
	1"	1.315	33.4	3, 5	4"
1-1/4"		1.25	31.8	3, 7.25	4"
	1-1/4"	1.660	42.2	6.25	4"
1-1/2"		1.5	38.1	2.5, 6, 7.5, 9, 12, 18, 24, 30, 36	4"
1-3/4"		1.75	44.5	2.5, 8, 9, 15, 24, 30, 36, 48	4"
	1-1/2"	1.9	48.3	5, 6, 7.5, 9, 10, 12, 18, 24, 30, 36, 48	4"
2"		2.0	50.8	2.5, 3, 3.5, 4, 5, 6, 8.5, 9, 10, 12, 18, 24, 30, 36, 48	4"
2-1/8"		2.125	54.0	3, 5, 12, 24, 30, 36	4-1/4"
2-1/4"		2.25	57.2	3, 9, 12, 15, 17, 24, 30, 36	4-1/2"
	2"	2.375	60.2	6, 7.5, 10, 12, 17, 24, 30, 36, 48	4"
2-1/2"		2.5	63.5	4, 6, 9, 12, 15, 17, 24, 30, 36, 48	5"
2-3/4"		2.75	69.9	2.75, 4, 17, 30, 36, 48	5-1/2"
	2-1/2"	2.875	73.0	12.5, 17, 24, 30, 36, 60*	5" *18"
3"		3.0	76.2	4, 4.5, 7.5, 9, 10, 12, 15, 18, 24, 30, 36, 48, 60*	6" *18"
3-1/4"		3.25	82.6	17, 30, 36	6-1/2"
3-1/2"	3"	3.5	88.9	3.5, 4.5, 6, 8.75, 12, 15, 16, 18, 24, 30, 36, 48	7"
3-3/4"		3.75	95.3	17, 24, 32, 36	7-1/2"
4"	3-1/2"	4.0	101.6	4, 5, 6, 7.75, 10, 12, 18, 20, 24, 30, 36, 48, 60	8"
4-1/4"		4.25	107.9	16, 30, 36	8-1/2"
4-1/2"	4"	4.5	114.3	6, 9, 12, 16, 18, 20, 24, 30, 36, 48, 60	9"
4-3/4"		4.75	120.7	36	9-1/2"
5"		5.0	127.0	5.5, 7.5, 12.5, 24, 30, 36, 42, 48, 60	10"
	5"	5.563	141.3	20, 30, 36, 42, 48, 60, 72*	10" *18"
5-1/2"		5.5	139.7	30, 36	11"
6"		6.0	152.4	9, 15, 24, 30, 36, 42, 48, 60, 72	12"
	6"	6.625	168.2	24, 30, 36, 42, 48, 60, 72	12"
8"		8.0	203.2	12, 20, 32, 48, 60, 72	16"
	8"	8.625	219.1	24, 32, 40, 42, 48, 60, 72	16"
	10"	10.75	273.1	40, 48, 50	20"
	12"	12.75	323.9	48, 60	24"


Capabilities subject to change without notice. For bends not shown on the list, please contact your sales representative.

TEES




OD	A	B
2"	16"	8"
3"	16"	8"
4"	16"	8"
4-1/2"	18"	9"
5"	18"	9"
6"	20"	10"
8"	24"	12"

WYES



OD	30°		45°		60°	
	C	D	C	D	C	D
2"	8"	8"	8"	8"	8"	8"
3"	8"	8"	8"	8"	8"	8"
4"	8"	8"	8"	8"	8"	8"
4-1/2"	10"	10"	10"	10"	10"	10"
5"	11"	11"	11"	11"	11"	11"
6"	12"	12"	12"	12"	12"	12"
8"	14"	14"	14"	14"	14"	14"

LATERALS



OD	30°		45°		60°	
	E	F	E	F	E	F
2"	8"	16"	8"	16"	8"	16"
3"	10"	20"	8"	16"	8"	16"
4"	12"	24"	10"	20"	10"	20"
4-1/2"	12"	24"	10"	20"	10"	20"
5"	15"	30"	12"	24"	12"	24"
6"	18"	36"	15"	30"	15"	30"
8"	22"	40"	18"	36"	18"	36"

ORDER TEES by tube or pipe size, wall thickness, and metal. O.D.s not listed, available on request.
ORDER LATERALS and WYES by tube or pipe size, wall thickness, metal and degree of angle.

Prices subject to change without notice.

©2026 Morris Coupling Company

Sight Glasses



- ***Clear look at the material flowing***
- ***Smooth "straight-thru" interior***
- ***Air-tight seal***
- ***"Sighting" section can be furnished in Pyrex***
- ***A grounding strip, permanently attached, eliminates the build-up of static electricity***
- ***Fast, easy installation***



TUBING OR PIPE INSERTED IN CLEAR ACRYLIC IN THE FOLLOWING SIZES:

Tubing Sizes with Aluminum Ends

Part Number	Overall O.D. "A"	Tube O.D. "B"	Tube O.D. "C"	List Price
SG 1-1/2-OD-16	1.750	1.500	1.375	PRICE AVAILABLE UPON REQUEST
SG 2-OD-16	2.250	2.000	1.875	
SG 2-OD-11	2.250	2.000	1.750	
SG 2-1/4-OD-16	2.500	2.250	2.125	
SG 2-1/2-OD-16	2.750	2.500	2.375	
SG 2-1/2-OD-11	2.750	2.500	2.250	
SG 3-OD-16	3.250	3.000	2.875	
SG 3-OD-11	3.250	3.000	2.750	
SG 3-1/2-OD-16	3.750	3.500	3.375	
SG 3-1/2-OD-11	3.750	3.500	3.250	
SG 4-OD-16	4.250	4.000	3.875	
SG 4-OD-11	4.250	4.000	3.750	
SG 4-1/2-OD-16	4.750	4.500	4.375	
SG 4-1/2-OD-11	4.750	4.500	4.250	
SG 5-OD-14	5.250	5.000	4.875	
SG 5-OD-11	5.250	5.000	4.750	
SG 6-OD-11	6.500	6.000	5.750	

Pipe Sizes with Steel Ends

Part Number	Overall O.D. "A"	Tube O.D. "B"	Tube O.D. "C"	List Price
SG 2" - IPS	2.500	2.375	2.000	POR
SG 2-1/2" - IPS	3.000	2.875	2.500	

Pipe Sizes with Aluminum Pipe Ends

Part Number	Overall O.D. "A"	Tube O.D. "B"	Tube O.D. "C"	List Price
SG 2" - AP	2.500	2.375	2.000	POR
SG 2-1/2" - AP	3.000	2.875	2.500	



CLEAR ACRYLIC INSERTED IN PIPE IN THE FOLLOWING SIZES:

Pipe Sizes with Steel Ends

Part Number	Overall O.D. "A"	Tube O.D. "B"	Tube O.D. "C"	List Price
SG 3" - IPS	3.500	3.250	3.000	POR
SG 3-1/2" - IPS	4.000	3.750	3.500	
SG 4" - IPS	4.500	4.250	4.000	
SG 5" - IPS	5.563	5.250	5.000	
SG 6" - IPS	6.625	6.500	6.000	

Pipe Sizes with Aluminum Pipe Ends

Part Number	Overall O.D. "A"	Tube O.D. "B"	Tube O.D. "C"	List Price
SG 3" - IPS	3.500	3.250	3.000	POR
SG 3-1/2" - IPS	4.000	3.750	3.500	
SG 4" - IPS	4.500	4.250	4.000	
SG 5" - IPS	5.563	5.250	5.000	
SG 6" - IPS	6.625	6.500	6.000	

Material:

Aluminum Tubing ..... 6061-T6 and 6063-T6
"Sight Glass" ..... Cast Acrylic Resin
Steel Pipe ..... Schedule 40
Aluminum Pipe ..... Schedule 40
(Available in Schedule 5 and 10)

Prices of special sizes and materials including Pyrex sighting section available on request.

When ordering, please be sure to use the correct part number. Also list tubing or pipe O.D. and wall thickness.

Prices of special sizes and materials available on request.

For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com

MORRIS COUPLING COMPANY

Morris Gaylord Vacuum Wands

Unloading powders or pellets made easy with Morris Coupling's line of Gaylord Vacuum Wands. Seven models available in aluminum (standard), carbon steel, stainless steel and plastic (shock-free). Available in diameters ranging from 1-1/2" to 4" and lengths 48" to 54".

Morris Basic, Standard, Deluxe and Dissipator series of Gaylord Wands offer the user a variety of options including air adjusting, "stay" clip, handle and filtering screens.



Basic Model – Aluminum Construction

Includes six air register holes and stand off loop at bottom.

Standard Length			Extended Length		
Diameter	Part No.	Length (in)	Diameter	Part No.	Length (in)
1-1/2	GBA 15U	48"	1-1/2	GBA 15UL	54"
2	GBA 20U	48"	2	GBA 20UL	54"
2-1/2	GBA 25U	48"	2-1/2	GBA 25UL	54"
3	GBA 30U	48"	3	GBA 30UL	54"
4	GBA 40U	48"	4	GBA 40UL	54"



Standard Model – Aluminum Construction

Includes adjustable air register ring and stand off loop at bottom.

Standard Length			Extended Length		
Diameter	Part No.	Length (in)	Diameter	Part No.	Length (in)
1-1/2	GSA 15U	48"	1-1/2	GSA 15UL	54"
2	GSA 20U	48"	2	GSA 20UL	54"
2-1/2	GSA 25U	48"	2-1/2	GSA 25UL	54"
3	GSA 30U	48"	3	GSA 30UL	54"
4	GSA 40U	48"	4	GSA 40UL	54"



Deluxe Model – Aluminum Construction

Includes adjustable air register ring, stand off loop, operator handle and Ever-Tite® cam and groove coupling.

Standard Length			Extended Length		
Diameter	Part No.	Length (in)	Diameter	Part No.	Length (in)
1-1/2	GDA 15U	48"	1-1/2	GDA 15UL	54"
2	GDA 20U	48"	2	GDA 20UL	54"
2-1/2	GDA 25U	48"	2-1/2	GDA 25UL	54"
3	GDA 30U	48"	3	GDA 30UL	54"
4	GDA 40U	48"	4	GDA 40UL	54"

Prices subject to change without notice.

©2026 Morris Coupling Company
Printed in U.S.A.

Morris Coupling Nomenclature

If You Prefer To Use Our Computer PIC Number Designation

WHEN ORDERING

XXX XXX X X X FG*

PRODUCT CLASS

DIAMETER SIZE

NUMBER OF BOLTS

GASKET PROTECTOR/ GROUNDING STRIP OPTIONS

1 = Aluminum Grounding Strip Only

2 = Stainless Steel Grounding Strip Only

3 = Gasket Protector Only

4 = Gasket Protector w/SS Grounding Strip

5 = Gasket Protector w/AL Grounding Strip

GASKET OPTIONS

B = Black	R = Red Rubber
W = White	S = Silicone
E = Black EPDM	V = Viton
P = White EPDM	

***DENOTES STOCK ITEM**

EXAMPLE

010 350 2 B 2

INTERNAL USE

DIAMETER

For 3-1/2" OD Tubing/3" IPS Pipe

2 BOLTS

BLACK GASKET

STAINLESS STEEL GROUNDING STRIP

For Prices and Delivery
Call Toll Free: 1-800-426-1579
Toll-Free Fax: 1-800-545-1399
E-mail: sales@morriscoupling.com

Phone: 814-459-1741
2240 W. 15th St., Erie, PA 16505
www.morriscoupling.com



MORRIS
COUPLING COMPANY

2240 West 15th Street
Erie, Pennsylvania U.S.A. 16505

P: (814) 459-1741
F: (814) 453-5155
E: sales@morriscoupling.com

morriscoupling.com

Effective September 2026.

© 2026 Morris Coupling Company / Printed in U.S.A.